EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0047-00
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey+Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake,ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	74.5
Offset (mm)	23.5
Swivel radius (mm)	75
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Brake colour	Grey
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	107 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

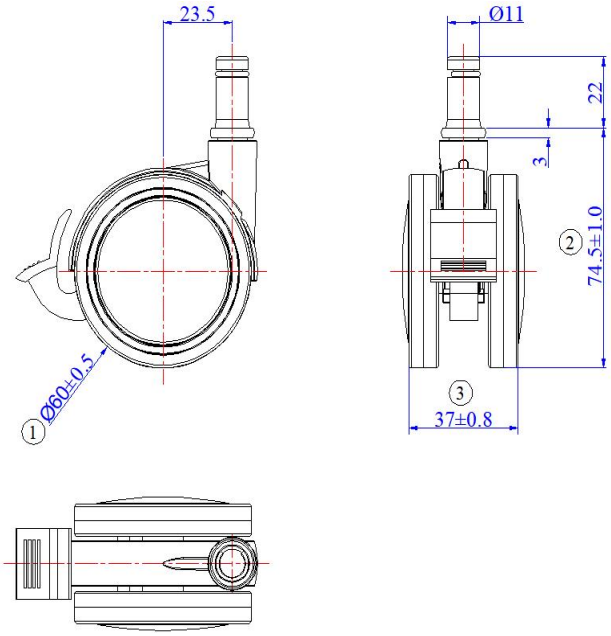

EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0014-00
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey+Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	74.5
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	100 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

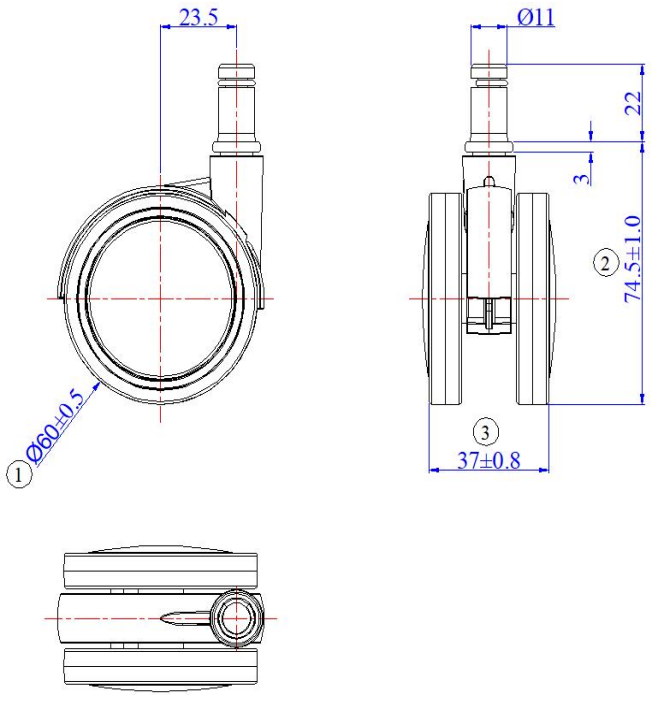

EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0076-00
SPA Code:

Double swivel caster, Housing made of PA
Colour:Silver Grey + Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake,ABS Cover
Connection via Threaded bolt M8x15MM


Mounting height (mm)	76.5
Offset (mm)	23.5
Swivel radius (mm)	75
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Brake colour	Grey
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	97 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

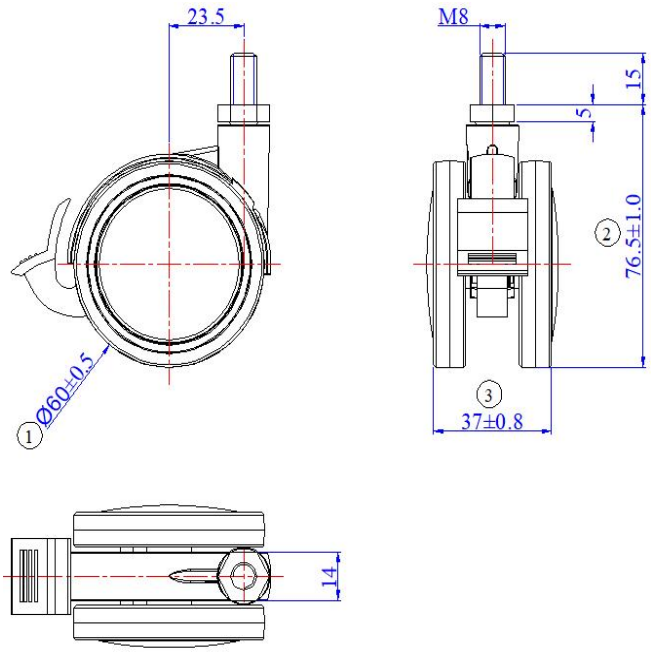

EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0038-00
SPA Code:

Double swivel caster, Housing made of PA
Colour:Silver Grey + Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,ABS Cover
Connection via Threaded bolt M8x15MM


Mounting height (mm)	76.5
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	91 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

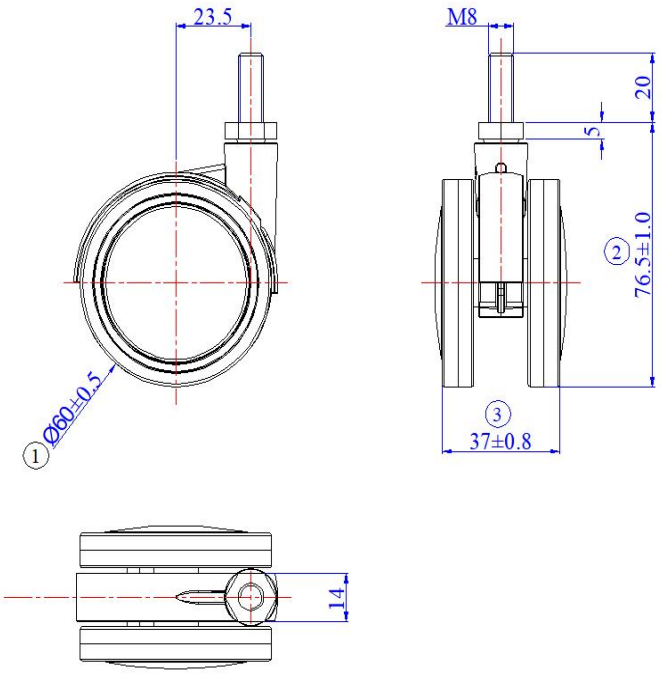

EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0056-00
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey + Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake,ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	82.5
Offset (mm)	23.5
Swivel radius (mm)	75
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Brake colour	Grey
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	130 g

Load Capacity (dynamic)	50kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

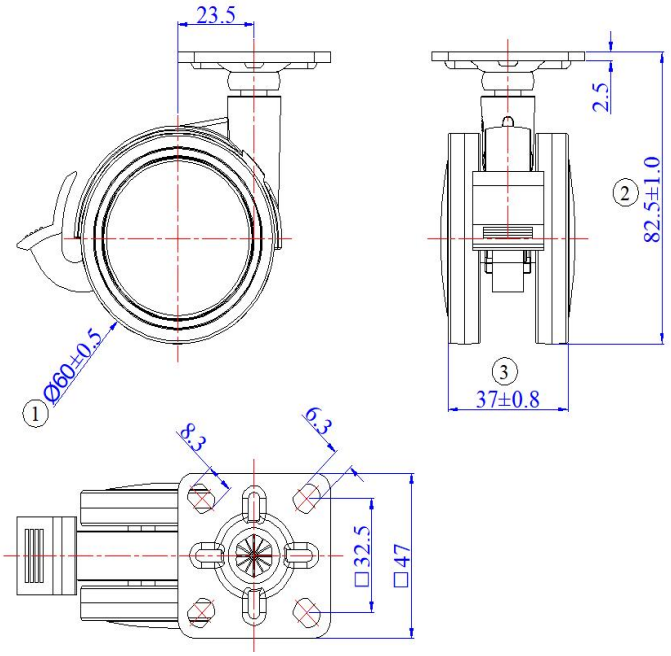

EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0020-00
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey + Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	82.5
Offset (mm)	23.5
Swivel radius (mm)	With Brake:75, W/O:57
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	122 g

Load Capacity (dynamic)	50kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

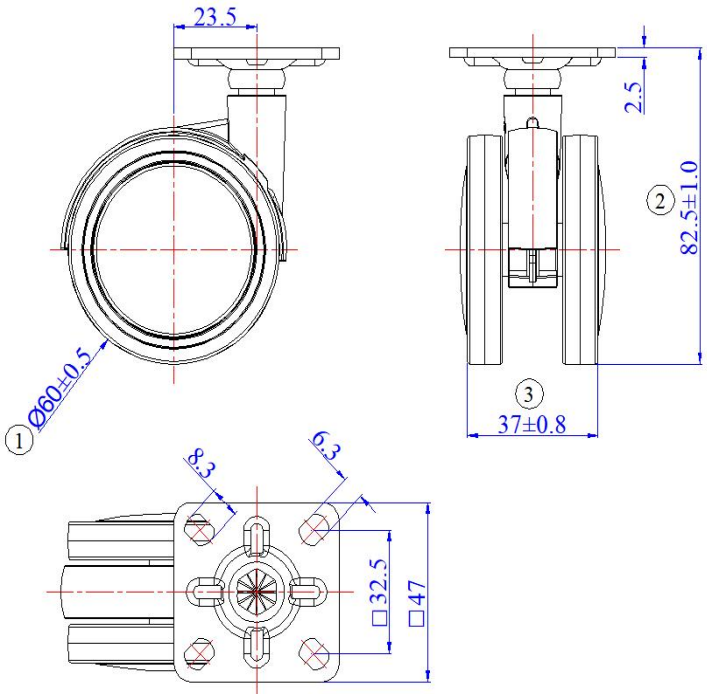

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey+Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake,ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	93
Offset (mm)	29
Swivel radius (mm)	86
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Brake colour	Grey
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	144 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

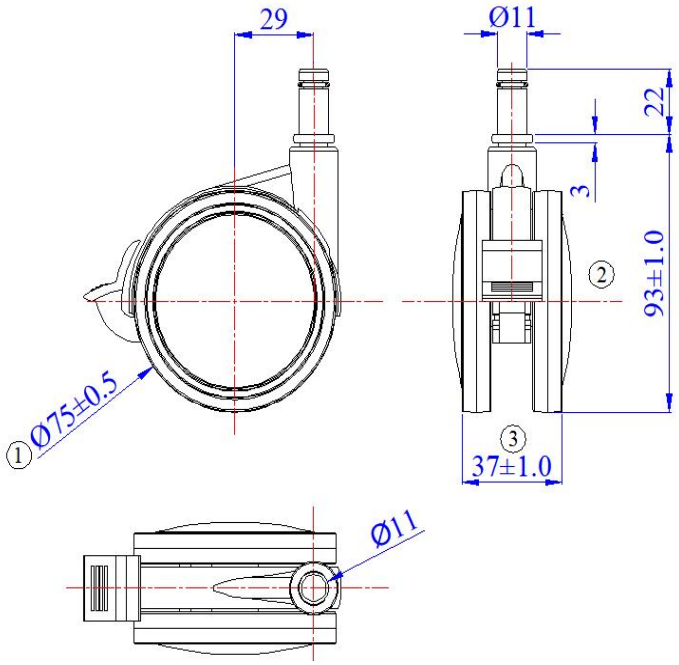

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey+Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	93
Offset (mm)	29
Swivel radius (mm)	70
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	137 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

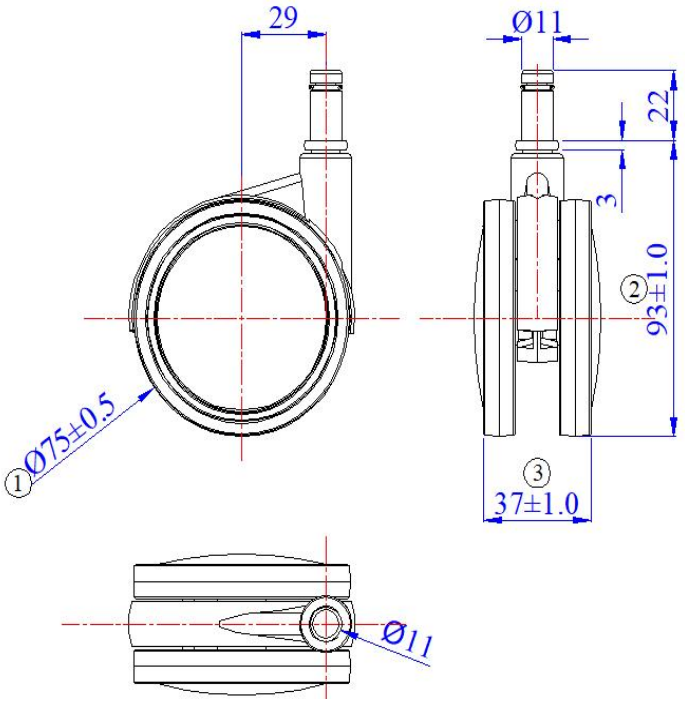

EVA 75

Swivel caster, Ø 75 mm



Robby Code:2005-0129-00
SPA Code:

Double swivel caster, Housing made of PA
Colour:Silver Grey + Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake,ABS Cover
Connection via Threaded bolt M10x15MM


Mounting height (mm)	95
Offset (mm)	29
Swivel radius (mm)	86
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Brake colour	Grey
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	140 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

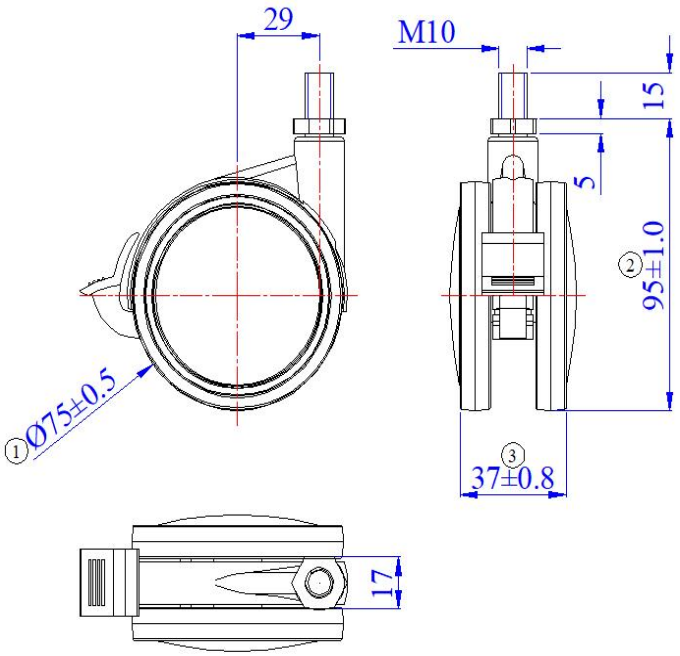

EVA 75

Swivel caster, Ø 75 mm



Robby Code:2005-0102-00
SPA Code:

Double swivel caster, Housing made of PA
Colour:Silver Grey + Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,ABS Cover
Connection via Threaded bolt M10x15MM


Mounting height (mm)	95
Offset (mm)	29
Swivel radius (mm)	70
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	133 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

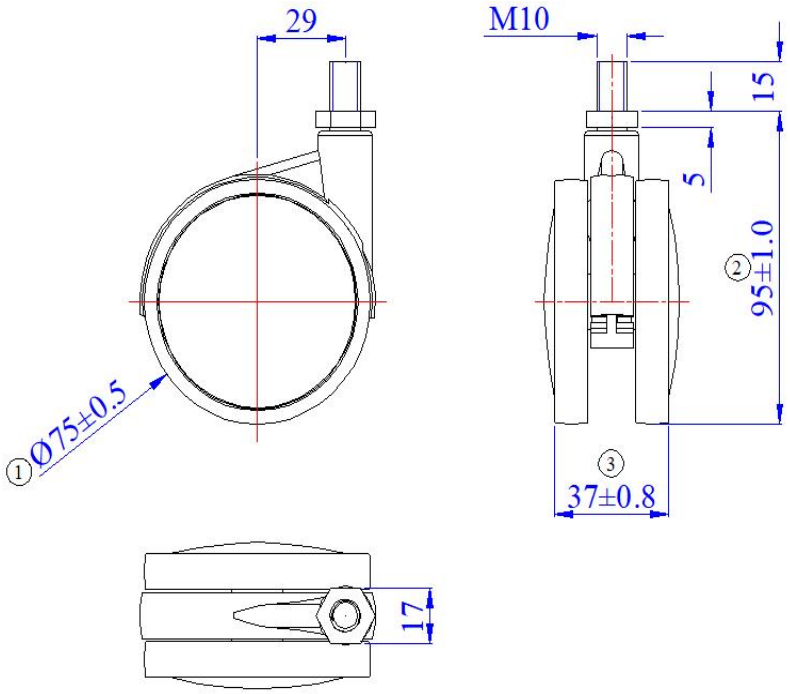

EVA 75

Swivel caster, Ø 75 mm



Robby Code:2005-0116-00
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey + Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake,ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	101
Offset (mm)	29
Swivel radius (mm)	86
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Brake colour	Grey
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	171 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

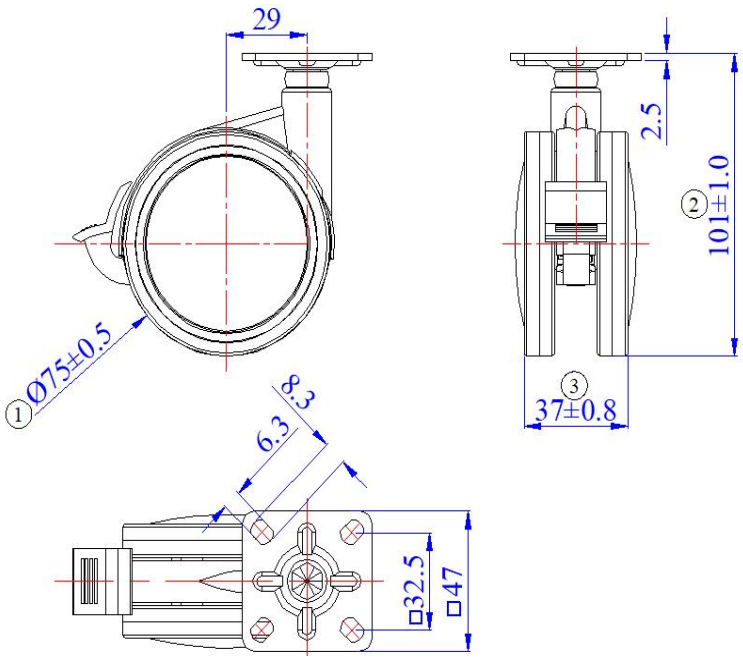

EVA 75

Swivel caster, Ø 75 mm



Robby Code:2005-0090-00
SPA Code:

Double swivel caster, Housing made of PA
Colour: Silver Grey + Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,ABS Cover
Connection via Plate 47x47x2.5mm

Mounting height (mm)	101
Offset (mm)	29
Swivel radius (mm)	68
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Silver grey
Colour of wheel hub/cover	Wheel : Grey, Cover: Silver grey
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	164 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

