GORDON 50

Swivel caster, Ø 50 mm



Robby Code:2014-0024-00
SPA Code:

Double swivel caster, Housing made of PA + ABS
Colour:Chrome + Black
Without Brake
Wheel with Plain Bearings and PA Wheel
Connection via Threaded bolt M8x15MM


Mounting height (mm)	61.5
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	50
Wheel width (mm)	50
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black RAL 9004
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	95g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21cm

Drawing

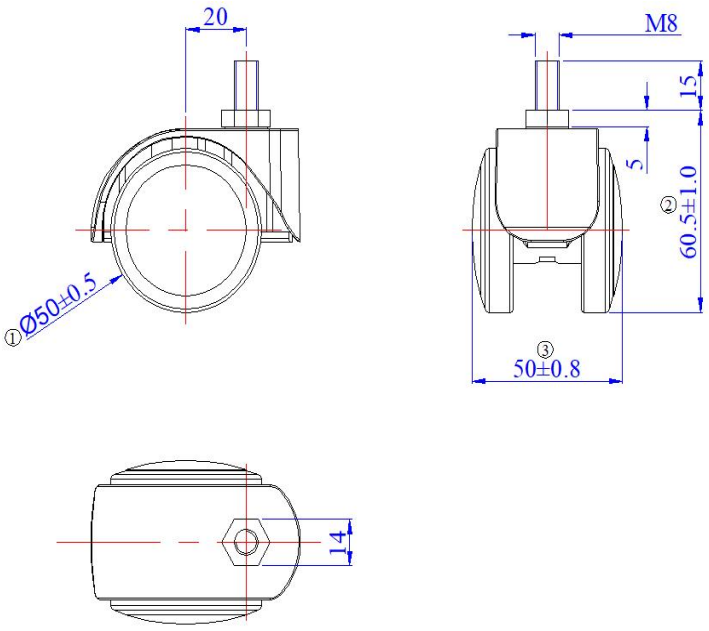

GORDON 50

Swivel caster, Ø 50 mm



Robby Code:2014-0018-00
SPA Code:

Double swivel caster, Housing made of PA + ABS
Colour:Chrome + Black
Unloading Brake
Wheel with Plain Bearings and PA Wheel
Connection via Threaded bolt M8x15MM


Mounting height (mm)	61.5
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	50
Wheel width (mm)	50
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black RAL 9004
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	95g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21cm

Drawing

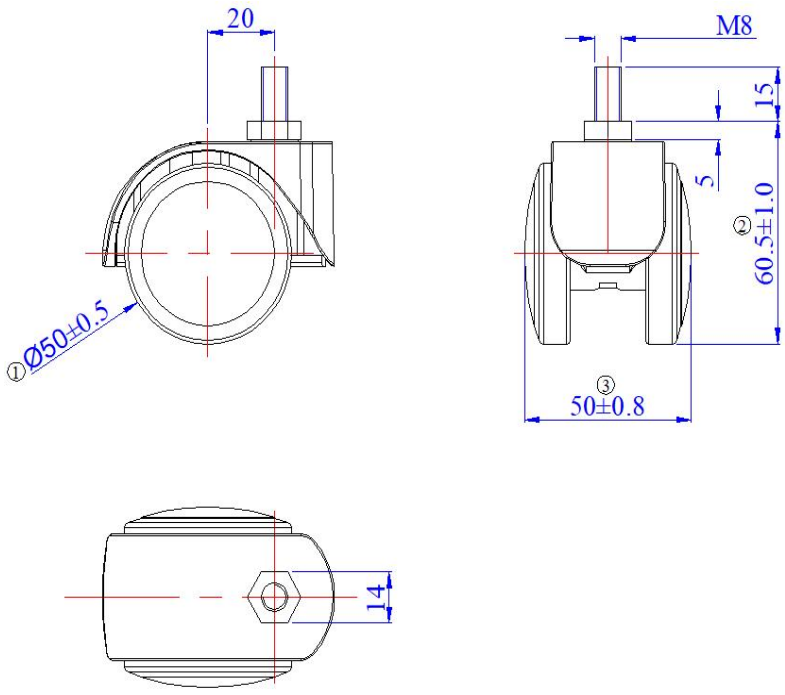

GORDON 50

Swivel caster, Ø 50 mm



Robby Code:2014-0023-00
SPA Code:

Double swivel caster, Housing made of PA + ABS
Colour: Chrome + Black
Without Brake
Wheel with Plain Bearings and PA Wheel
Connection via Plate 42x42x2mm


Mounting height (mm)	65.5
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	50
Wheel width (mm)	50
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black RAL 9004
Attachment	Plate
Fitting dimension	42x42x2mm
Weight	128g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21cm

Drawing

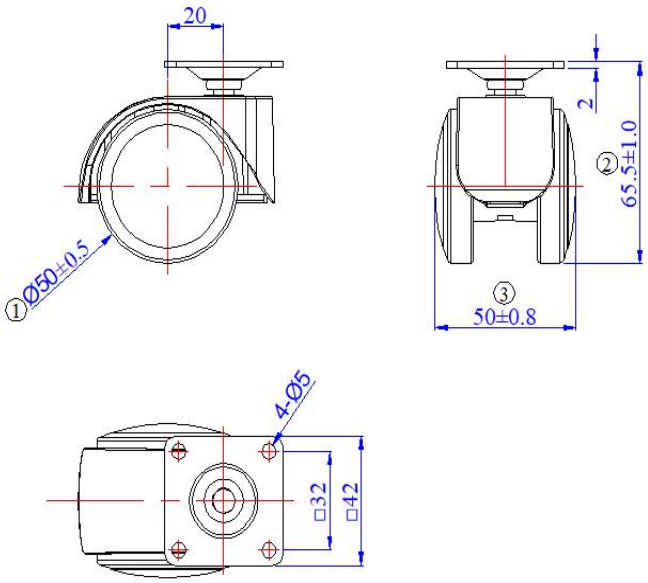

GORDON 50

Swivel caster, Ø 50 mm



Robby Code:2014-0015-00
SPA Code:

Double swivel caster, Housing made of PA + ABS
Colour: Chrome + Black
Unloading Brake
Wheel with Plain Bearings and PA Wheel
Connection via Plate 42x42x2mm


Mounting height (mm)	66.5
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	50
Wheel width (mm)	50
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black RAL 9004
Attachment	Plate
Fitting dimension	42x42x2mm
Weight	128g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21cm

Drawing

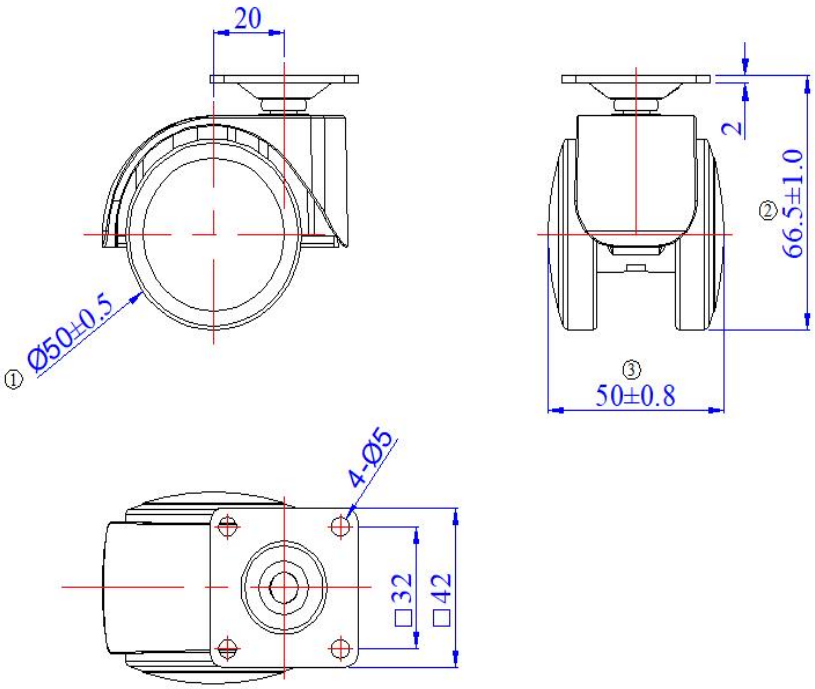

GORDON 50

Swivel caster, Ø 50 mm



Robby Code:2014-0001-00
SPA Code:

Double swivel caster, Housing made of PA + ABS
Colour: Chrome + Black
Without Brake
Wheel with Plain Bearings and PA Wheel
Connection via Pin Ø11x22mm


Mounting height (mm)	58.5
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	50
Wheel width (mm)	50
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black RAL 9004
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	102g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21cm

Drawing

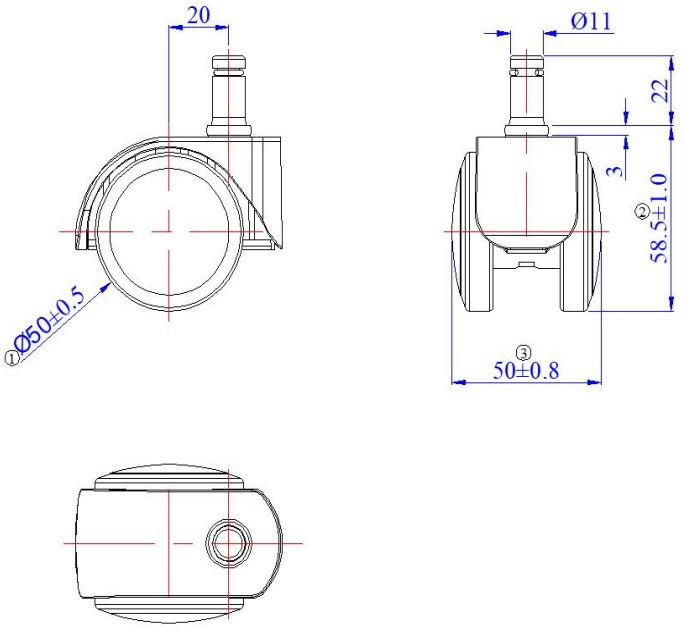

GORDON 50

Swivel caster, Ø 50 mm



Robby Code:2014-0012-00
SPA Code:

Double swivel caster, Housing made of PA + ABS
Colour: Chrome + Black
Unloading Brake
Wheel with Plain Bearings and PA Wheel
Connection via Pin Ø11x22mm

Mounting height (mm)	59.5
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	50
Wheel width (mm)	50
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black RAL 9004
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	102g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21cm

Drawing

