IVY 60

Swivel caster, Ø 60 mm



Robby Code:2020-0014-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,Brake PA,Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	69
Offset (mm)	22
Swivel radius (mm)	67
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Brake colour	Light grey RAL7040
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	116 g

Load Capacity (dynamic)	40 kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

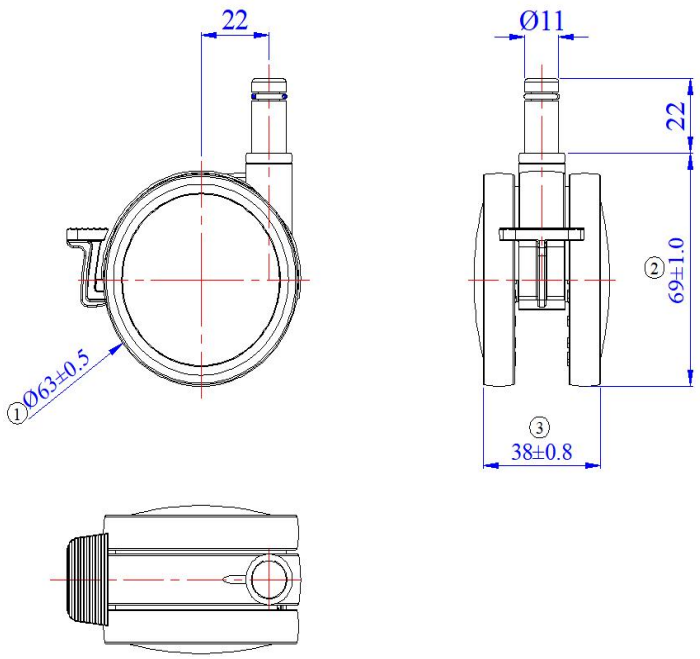

IVY 60

Swivel caster, Ø 60 mm



Robby Code:2020-0030-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	69
Offset (mm)	22
Swivel radius (mm)	57
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	108 g

Load Capacity (dynamic)	40 kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

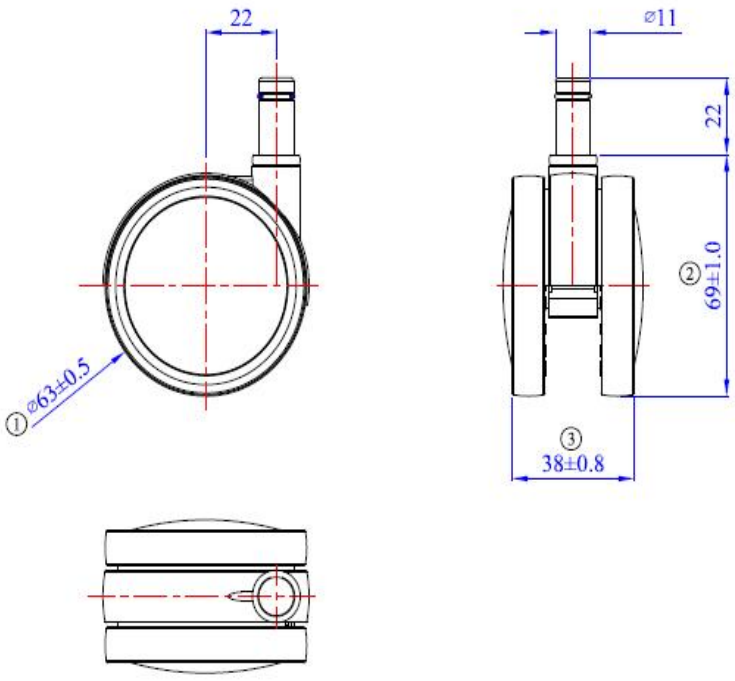

IVY 60

Swivel caster, Ø 60 mm



Robby Code:2020-0021-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,Brake PA,Cover PP
Connection via Threaded bolt M8x15MM


Mounting height (mm)	70
Offset (mm)	22
Swivel radius (mm)	67
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Brake colour	Light grey RAL7040
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	83 g

Load Capacity (dynamic)	40 kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

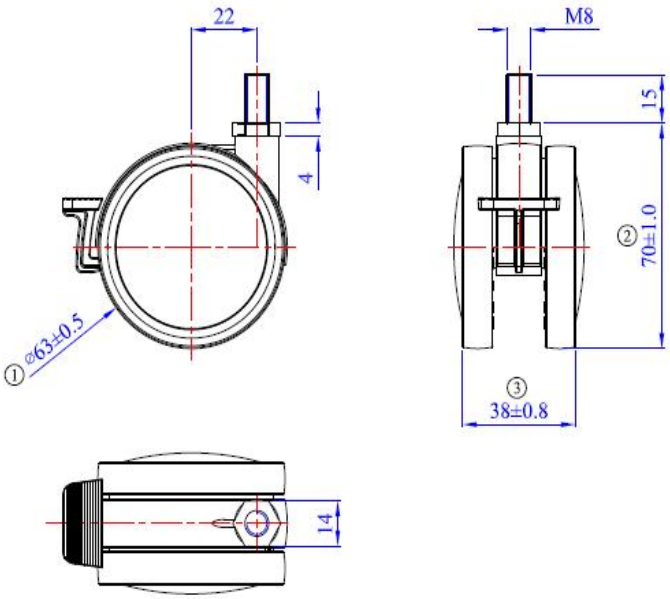

IVY 60

Swivel caster, Ø 60 mm



Robby Code:2020-0007-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,Cover PP
Connection via Threaded bolt M8x15MM


Mounting height (mm)	70
Offset (mm)	22
Swivel radius (mm)	57
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	79 g

Load Capacity (dynamic)	40 kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

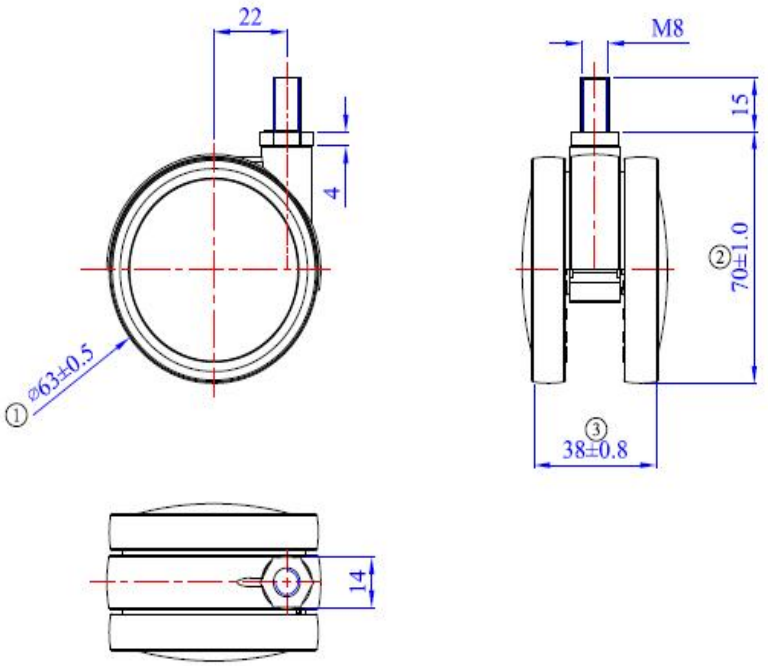

IVYE 60

Swivel caster, Ø 60 mm



Robby Code:2020-0016-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,Brake PA,Cover PP
Connection via Plate 42x42x2mm


Mounting height (mm)	74.5
Offset (mm)	22
Swivel radius (mm)	67
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Brake colour	Light grey RAL7040
Attachment	Plate
Fitting dimension	42x42x2mm
Weight	103 g

Load Capacity (dynamic)	40kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21cm

Drawing

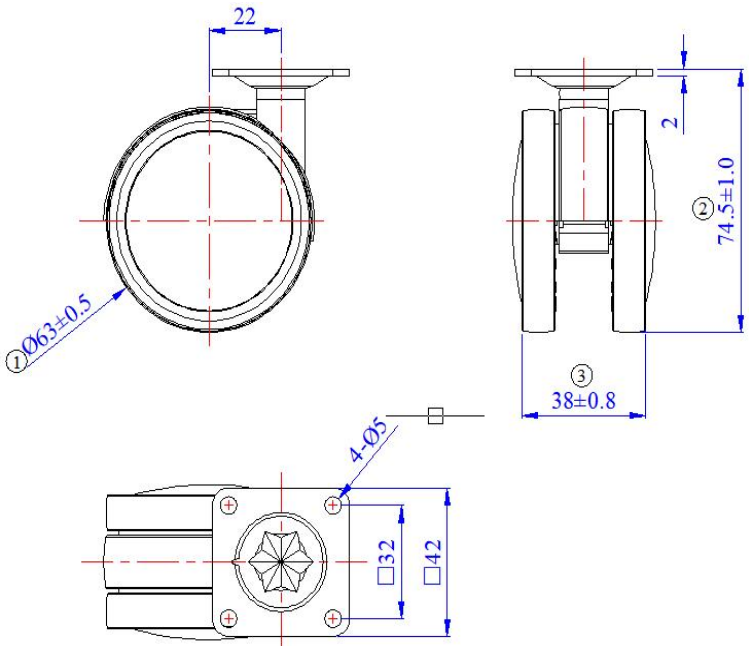

IVYE 60

Swivel caster, Ø 60 mm



Robby Code:2020-0003-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel,Cover PP
Connection via Plate 42x42x2mm


Mounting height (mm)	74.5
Offset (mm)	22
Swivel radius (mm)	57
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Attachment	Plate
Fitting dimension	42x42x2mm
Weight	99 g

Load Capacity (dynamic)	40kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

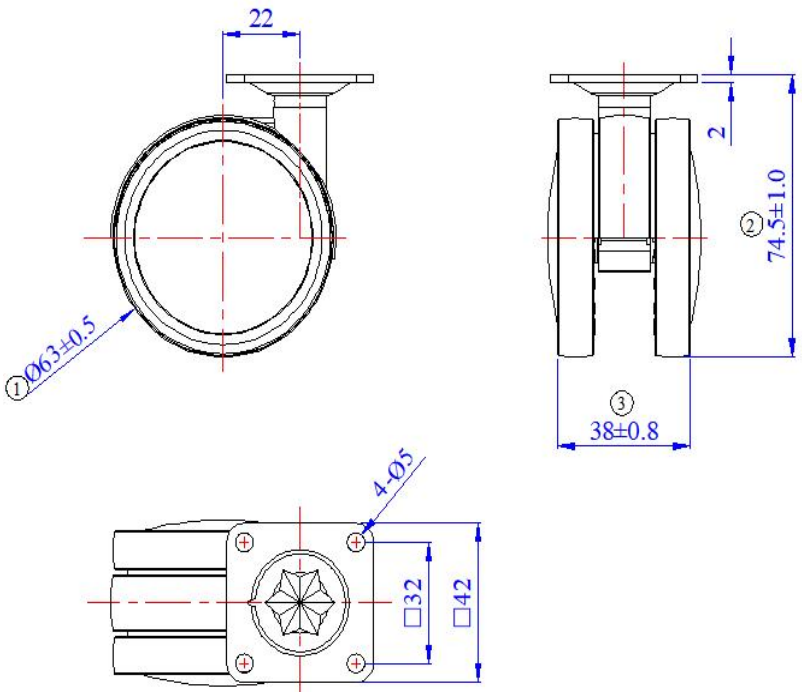

IVY 60

Swivel caster, Ø 60 mm



Robby Code:2020-0035-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,Brake PA,Cover PP
Connection via U Plate :U16/19/22


Mounting height (mm)	74
Offset (mm)	22
Swivel radius (mm)	67
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Brake colour	Light grey RAL7040
Attachment	U Plate
Fitting dimension	U16/19/22
Weight	98 g

Load Capacity (dynamic)	40 kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

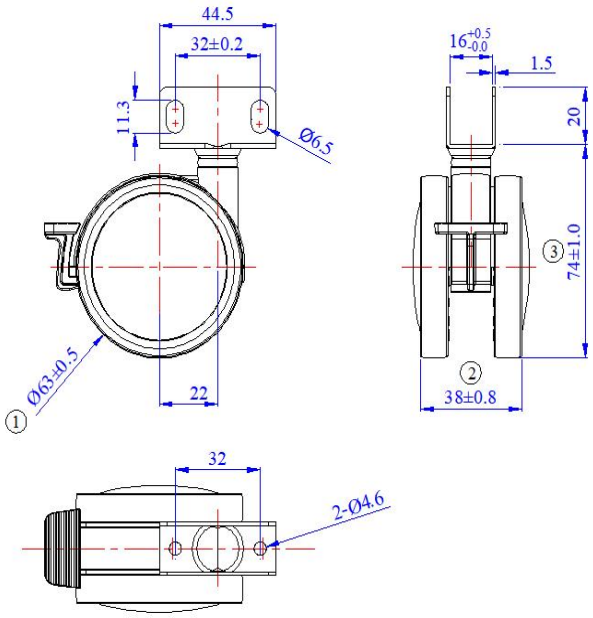

IVY 60

Swivel caster, Ø 60 mm



Robby Code:2020-0034-00
SPA Code:

Double swivel caster, Housing made of PP
Colour: White + Light Grey + Dark grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,Cover PP
Connection via U Plate :U16/19/22

Mounting height (mm)	74
Offset (mm)	22
Swivel radius (mm)	57
Wheel Ø (mm)	63
Wheel width (mm)	38
Wheel hardness	95shore A
Fork colour	White RAL9016
Colour of wheel hub/cover	Light grey RAL7040.Dark grey RAL7012
Attachment	U Plate
Fitting dimension	U16/19/22
Weight	92 g

Load Capacity (dynamic)	40 kg
Load Capacity (static)	80 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

