KOO 60

Swivel caster, Ø 60 mm



Robby Code:2008-0187-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: all black
With Brake
Wheel with Ball Bearings and PA +TPU Wheel, Brake PA+20%GF, Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	69
Offset (mm)	22
Swivel radius (mm)	68
Wheel Ø (mm)	60
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black:
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	253 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Box	4 pcs
QTY Per Carton	40 pcs
Carton Size	42x36x13 cm

Drawing

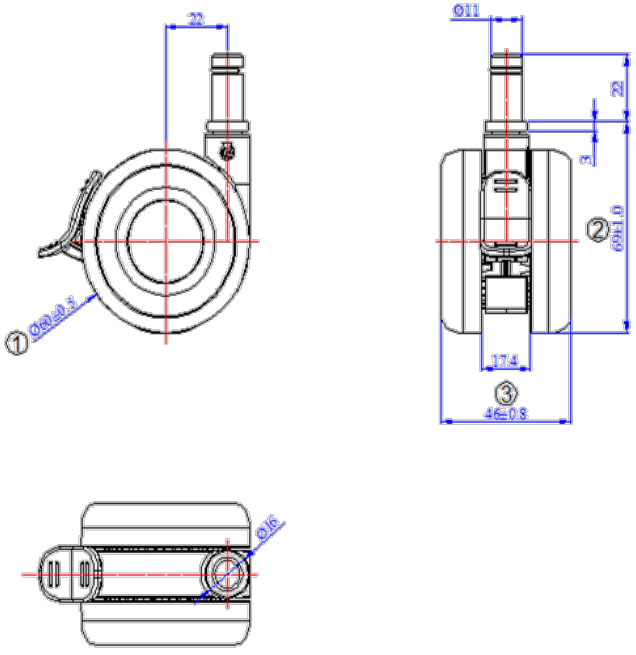

KOO 60

Swivel caster, Ø 60 mm



Robby Code: 2008-0186-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: all black
Without Brake
Wheel with Ball Bearings and PA +TPU Wheel,Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	69
Offset (mm)	22
Swivel radius (mm)	56
Wheel Ø (mm)	60
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	243 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Box	4 pcs
QTY Per Carton	40 pcs
Carton Size	42x36x13 cm

Drawing

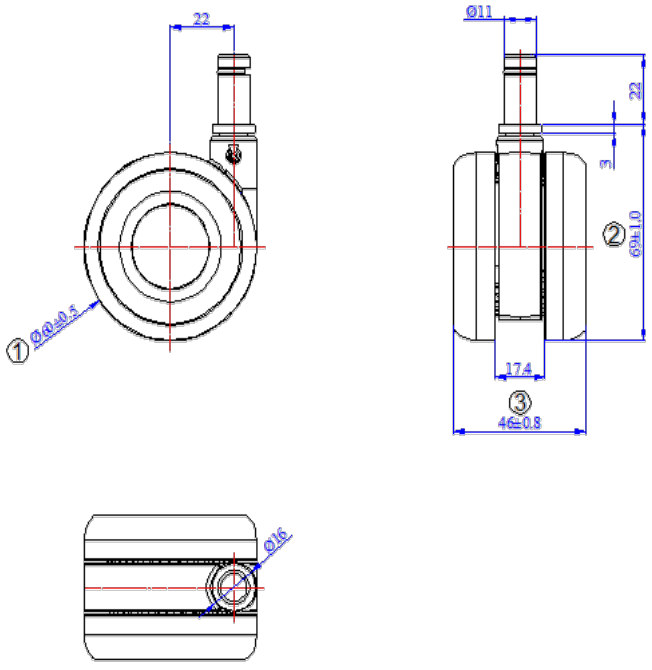

KOO 60

Swivel caster, Ø 60 mm



Robby Code:2008-0191-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Black
With Brake
Wheel with Ball Bearings and PA +TPU Wheel， Brake PA+20%GF， Cover PP
Connection via Threaded bolt M10x15mm


Mounting height (mm)	71
Offset (mm)	22
Swivel radius (mm)	68
Wheel Ø (mm)	60
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	251 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Box	4 pcs
QTY Per Carton	40 pcs
Carton Size	42x36x13 cm

Drawing

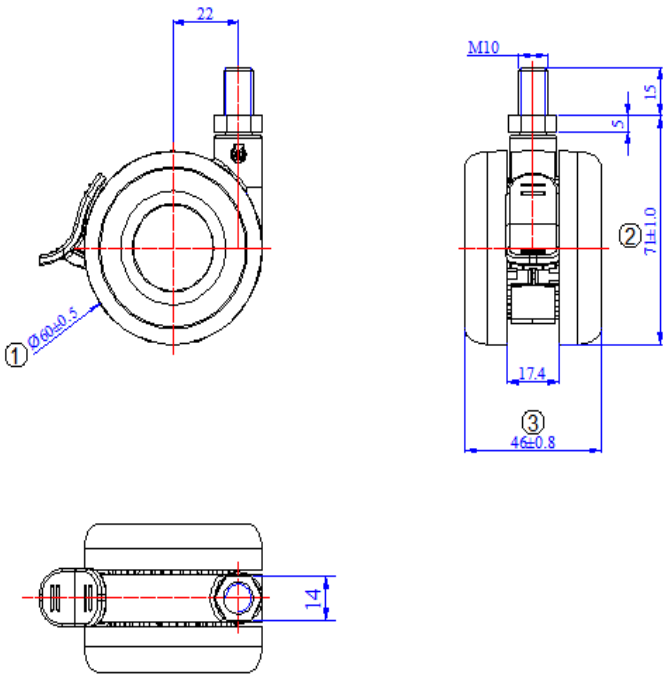

KOO 60

Swivel caster, Ø 60 mm



Robby Code:2008-0192-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Black
Without Brake
Wheel with Ball Bearings and PA +TPU Wheel, Cover PP
Connection via Threaded bolt M10x15mm

Mounting height (mm)	71
Offset (mm)	22
Swivel radius (mm)	56
Wheel Ø (mm)	60
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black


Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN12528
	ANSI BIFMA 5.1

Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	241 g

Packing Details

QTY Per Box	4 pcs
QTY Per Carton	40 pcs
Carton Size	42x36x13 cm

Drawing

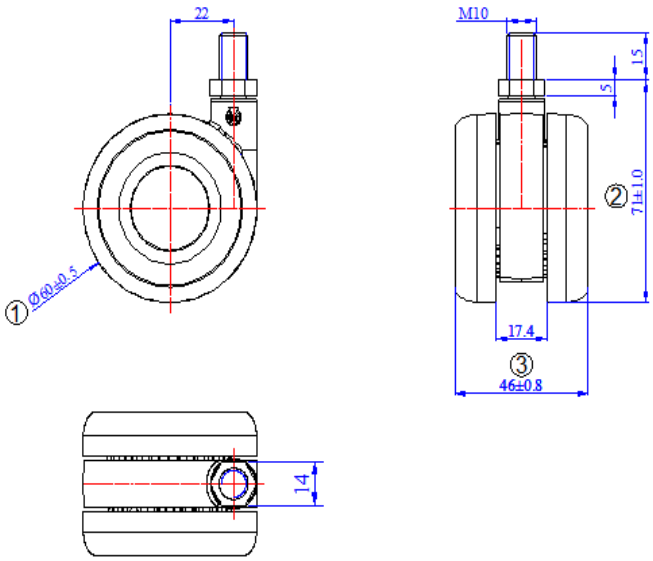

KOO 60

Swivel caster, Ø 60 mm



Robby Code:2008-0202-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Black
With Brake
Wheel with Ball Bearings and PA +TPU Wheel, Brake PA+20%GF, Cover PP
Connection via Plate 47x47x2.5mm


Mounting height (mm)	75.5
Offset (mm)	22
Swivel radius (mm)	68
Wheel Ø (mm)	60
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	283 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Box	4 pcs
QTY Per Carton	40 pcs
Carton Size	42x36x13 cm

Drawing

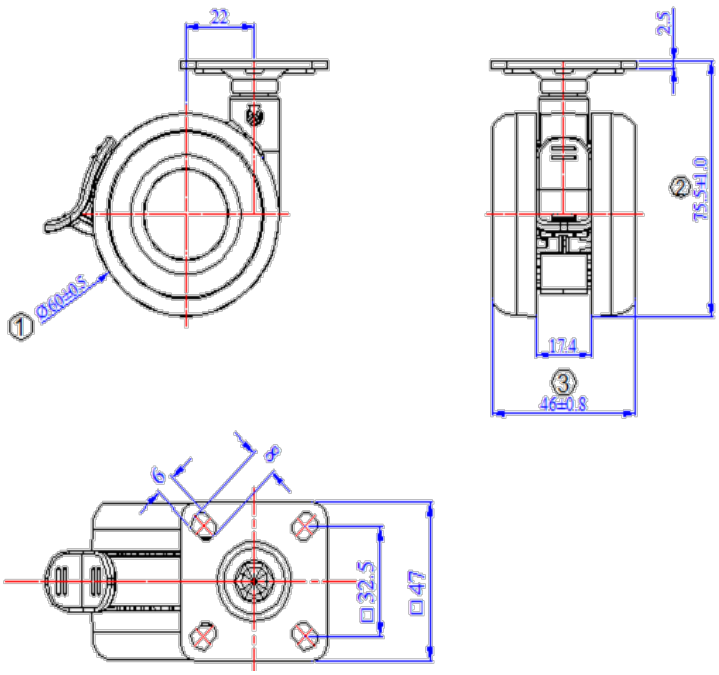

KOO 60

Swivel caster, Ø 60 mm



Robby Code:2008-0190-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Black
Without Brake
Wheel with Ball Bearings and PA +TPU Wheel,Cover PP
Connection via Plate 47x47x2.5mm

Mounting height (mm)	75.5
Offset (mm)	22
Swivel radius (mm)	56
Wheel Ø (mm)	60
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	273 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Box	4 pcs
QTY Per Carton	40 pcs
Carton Size	42x36x13 cm

Drawing

