Kelly 60

Swivel caster, Ø 60 mm



Robby Code:2006-0092-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome +black
With Brake
Wheel with Plain Bearings and PA+TPU Wheel,Brake PA,Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	75
Offset (mm)	23.5
Swivel radius (mm)	71
Wheel Ø (mm)	61
Wheel width (mm)	41.5
Wheel hardness	95shore A
Fork colour	Chrom
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	192 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

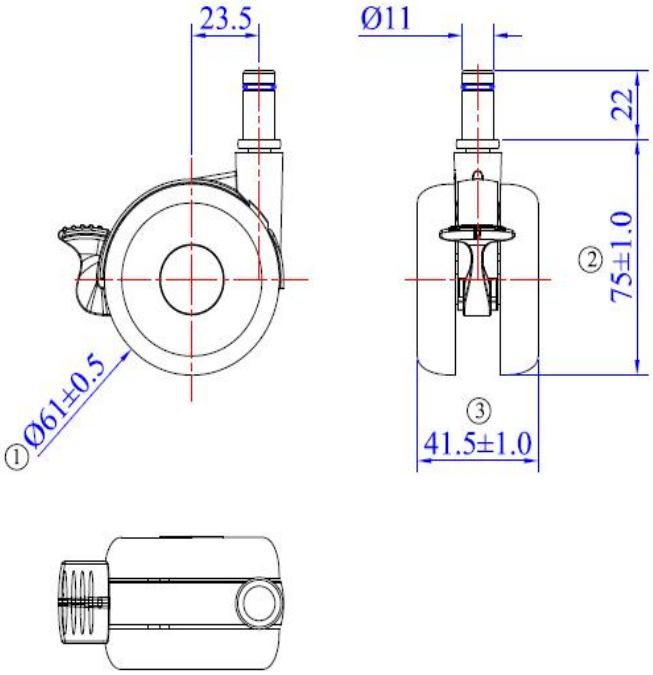

Kelly 60

Swivel caster, Ø 60 mm



Robby Code:2006-0091-00
SPA Code:


Double swivel caster, Housing made of Zinc Alloy
Ccolour: Chrome +black
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel, Cover PP
Connection via Pin Ø11x22mm

Mounting height (mm)	75
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	61
Wheel width (mm)	41.5
Wheel hardness	95shore A
Fork colour	Chrom
Colour of wheel hub/cover	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	182.9 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details	
QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

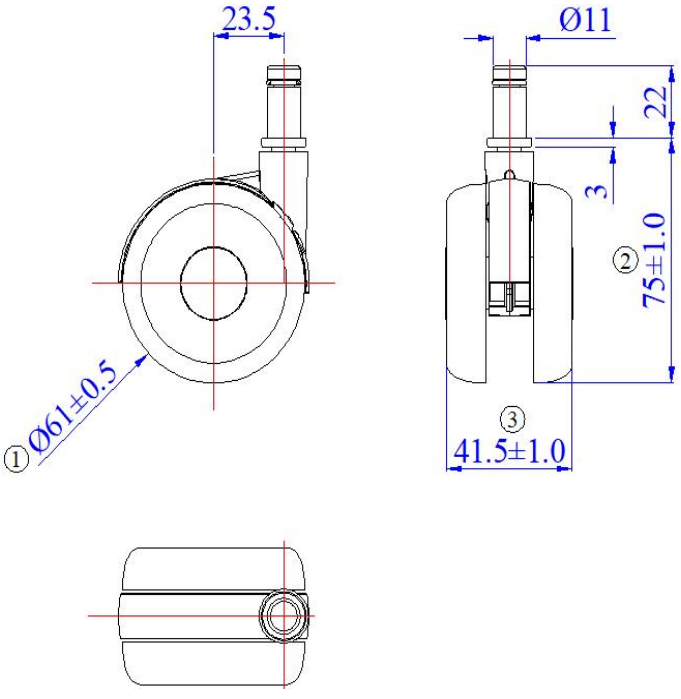

LAIA 60

Swivel caster, Ø 60 mm



Robby Code:2006-0180-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome +black
With Brake
Wheel with Plain Bearings and PA+TPU Wheel,Brake PA,Cover PP
Connection via Threaded bolt M8x15MM


Mounting height (mm)	77
Offset (mm)	23.5
Swivel radius (mm)	71
Wheel Ø (mm)	61
Wheel width (mm)	41.5
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	181 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

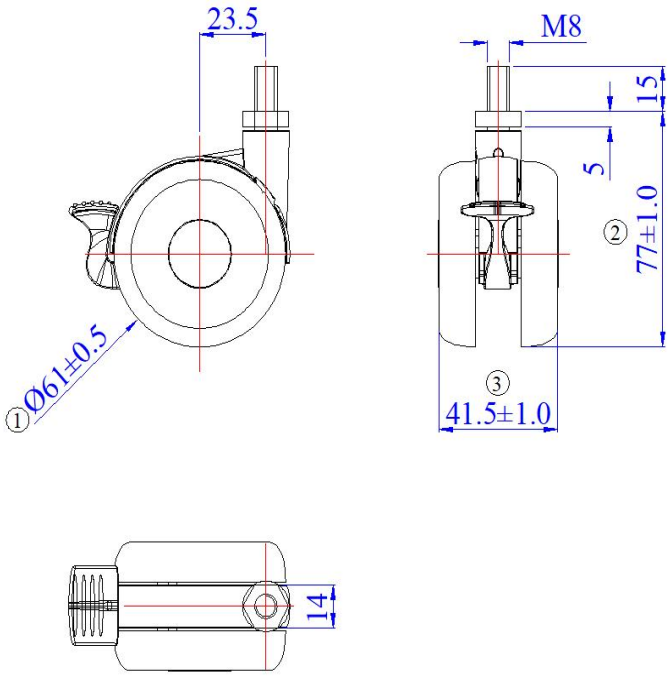

LAIA 60

Swivel caster, Ø 60 mm



Robby Code:2006-0179-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome+ Black
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel, Cover PP
Connection via Threaded bolt M8x15MM


Mounting height (mm)	77
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	61
Wheel width (mm)	41.5
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	173 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

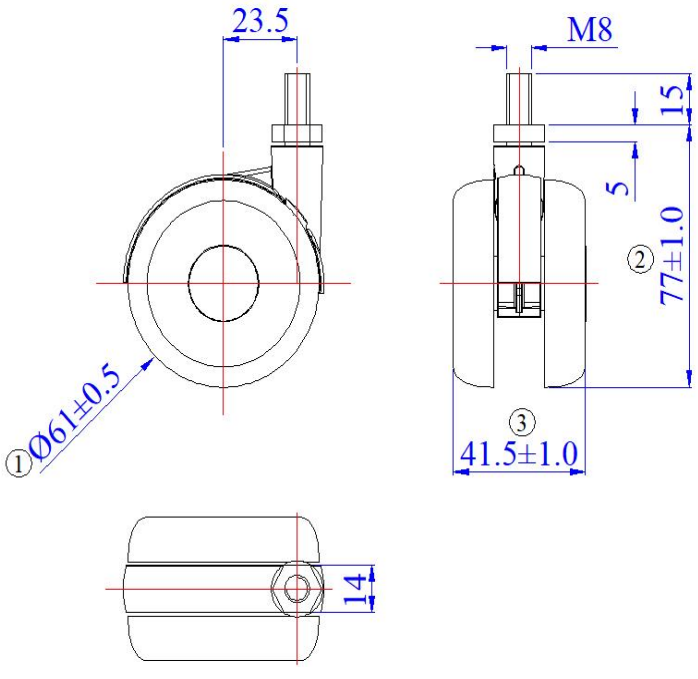

LAIA 60

Swivel caster, Ø 60 mm



Robby Code:2006-0154-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome+Black
With Brake
Wheel with Plain Bearings and PA+TPU Wheel,Brake PA,Cover PP
Connection via Plate 47x47x2.5mm


Mounting height (mm)	82
Offset (mm)	23.5
Swivel radius (mm)	73
Wheel Ø (mm)	61
Wheel width (mm)	41.5
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	218 g


Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

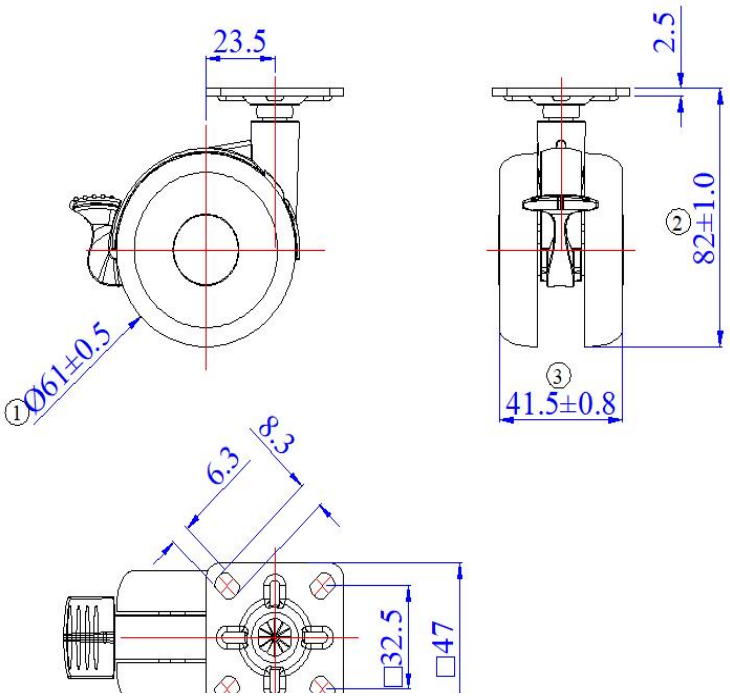



LAIA 60

Swivel caster, Ø 60 mm



Robby Code:2006-0156-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome+Black
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel, Cover PP
Connection via Plate 47x47x2.5mm


Mounting height (mm)	82
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	61
Wheel width (mm)	41.5
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	210 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

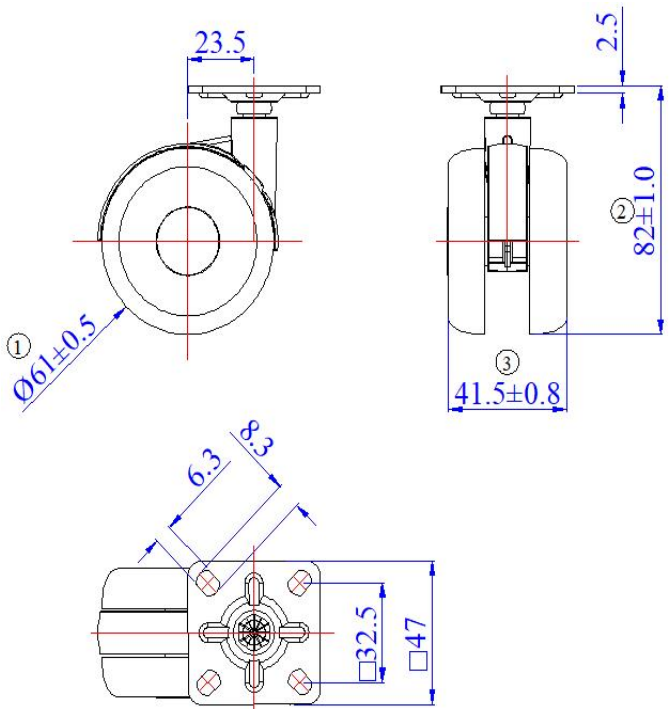

LAIA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy,
Colour: Chrome + Black
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA, Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	93.5
Offset (mm)	29
Swivel radius (mm)	83
Wheel Ø (mm)	76
Wheel width (mm)	47
Wheel hardness	95shore A
Fork colour	Chrom
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	286 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

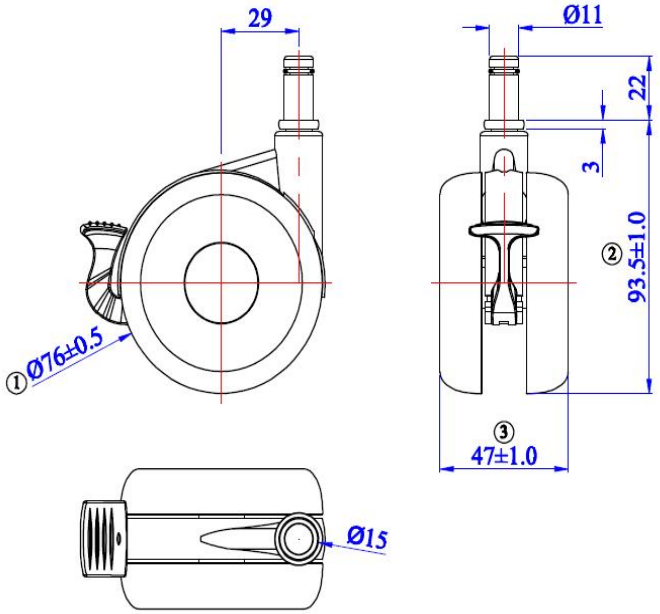

LAIA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy,
Colour: Chrome + Black
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel,Cover PP
Connection via Pin Ø11x22mm


Mounting height (mm)	93.5
Offset (mm)	29
Swivel radius (mm)	69
Wheel Ø (mm)	76
Wheel width (mm)	47
Wheel hardness	95shore A
Fork colour	Chrom
Colour of wheel hub/cover	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	276 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

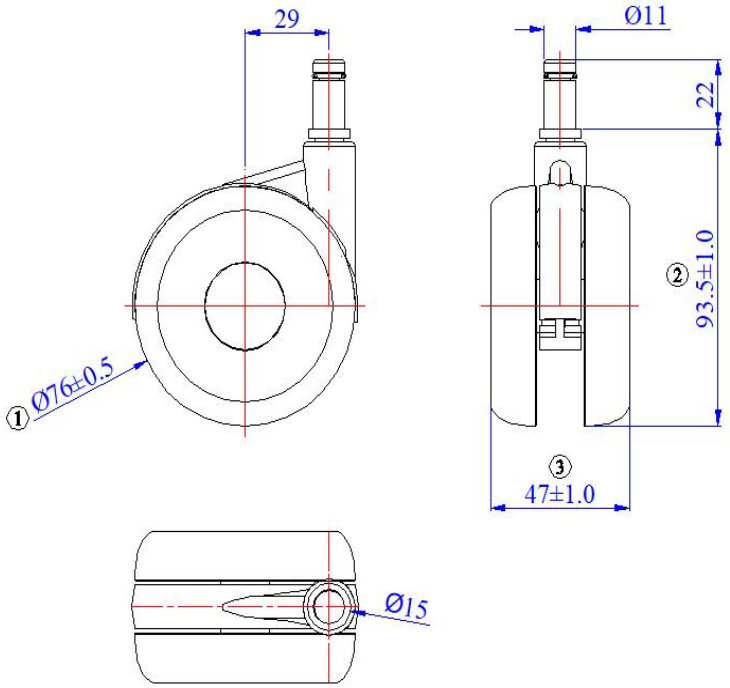

LAIA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy,
Colour:Chrome+ Black
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA, Cover PP
Connection via Threaded bolt 10x15MM


Mounting height (mm)	95.5
Offset (mm)	29
Swivel radius (mm)	83
Wheel Ø (mm)	76
Wheel width (mm)	47
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	283 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	40 pcs
Carton Size	38x21x20 cm

Drawing

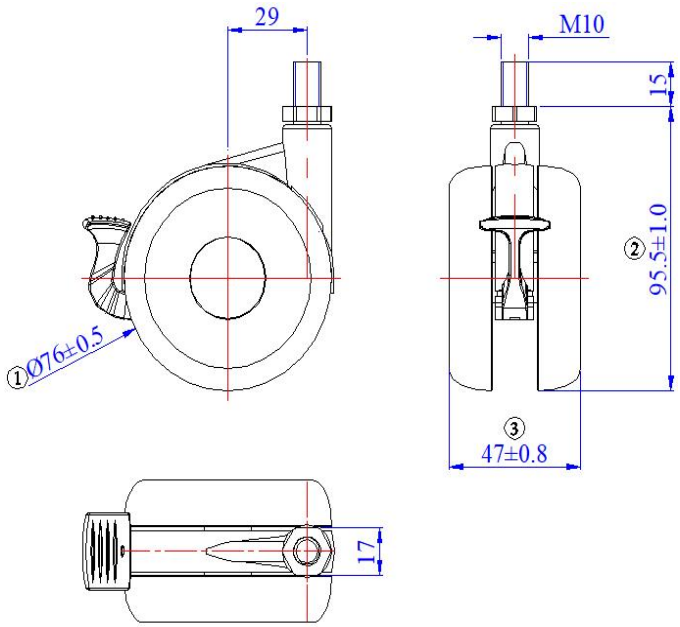

LAIA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy,
Colour:Chrome+ Black
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel,Cover PP
Connection via Threaded bolt 10x15MM


Mounting height (mm)	93.5
Offset (mm)	29
Swivel radius (mm)	69
Wheel Ø (mm)	76
Wheel width (mm)	47
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	278 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	40 pcs
Carton Size	38x21x20 cm

Drawing

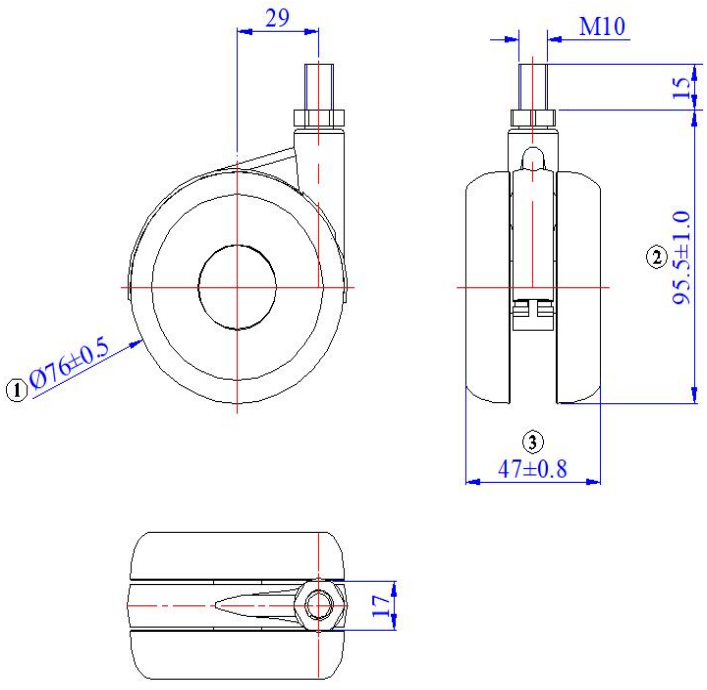

LAIA 75

Swivel caster, Ø 75 mm



Robby Code:2006-0157-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy,
Colour: Chrome+Black
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA, Cover PP
Connection via Plate 47x47x.2.5mm


Mounting height (mm)	101.5
Offset (mm)	29
Swivel radius (mm)	83
Wheel Ø (mm)	76
Wheel width (mm)	47
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	310 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

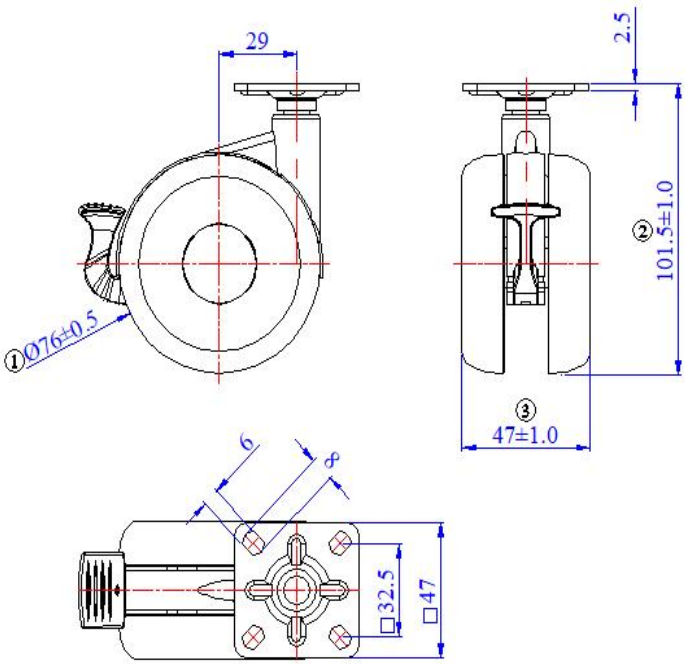

LAIA 75

Swivel caster, Ø 75 mm



Robby Code:2006-0158-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy,
Colour: Chrome+Black
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel,Cover PP
Connection via Plate 47x47x.2.5mm

Mounting height (mm)	101.5
Offset (mm)	29
Swivel radius (mm)	69
Wheel Ø (mm)	76
Wheel width (mm)	47
Wheel hardness	95shore A
Fork colour	Chrome
Colour of wheel hub/cover	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	305 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

