HELEN 80

Swivel caster, Ø 80 mm



Robby Code:2041-0032-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Silver Grey +black
With Brake
Wheel with Plain Bearings and PA Wheel, Brake PA, Cover ABS
Connection via Pin Ø11x22mm


Mounting height (mm)	99
Offset (mm)	28.8
Swivel radius (mm)	91
Wheel Ø (mm)	80
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Silver Grey
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	282 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	42x28x21 cm

Drawing

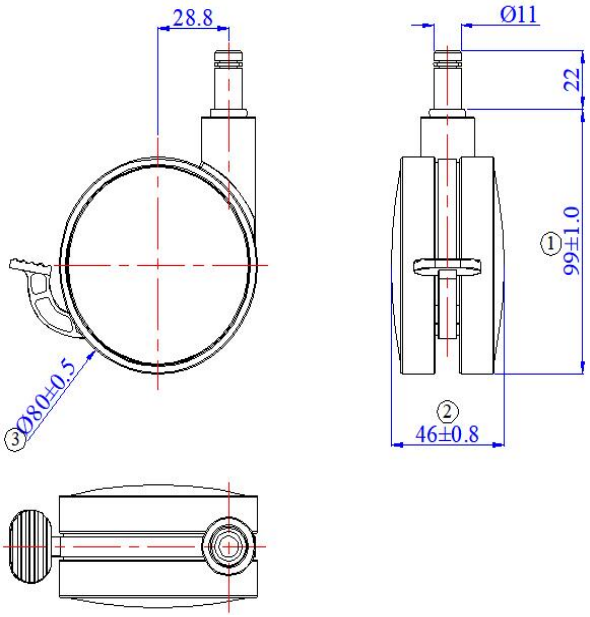

HELEN 80

Swivel caster, Ø 80 mm



Robby Code:2041-0031-00
SPA Code:


Double swivel caster, Housing made of Zinc Alloy
Colour: Silver Grey +black
Without Brake
Wheel with Plain Bearings and PA Wheel, Cover ABS
Connection via Pin Ø11x22mm

Mounting height (mm)	99
Offset (mm)	28.8
Swivel radius (mm)	73
Wheel Ø (mm)	80
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Silver Grey
Colour of wheel hub/cover	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	269 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details	
QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	42x28x21 cm

Drawing

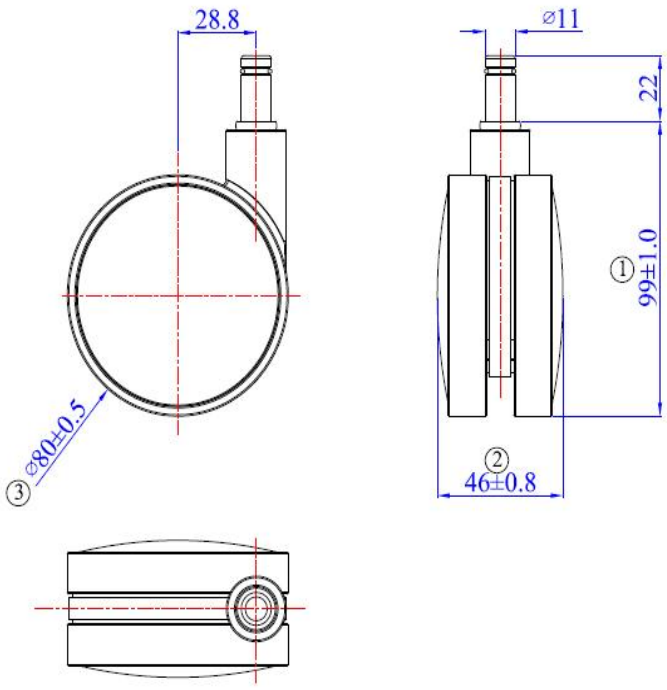

HELEN 80

Swivel caster, Ø 80 mm



Robby Code:2041-0025-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Silver Grey+ Black
With Brake
Wheel with Plain Bearings and PA Wheel, Brake PA, Cover ABS
Connection via Threaded bolt 10x15MM


Mounting height (mm)	100
Offset (mm)	28.8
Swivel radius (mm)	91
Wheel Ø (mm)	80
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Silver Grey
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	281 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	50 pcs
Carton Size	42x28x21 cm

Drawing

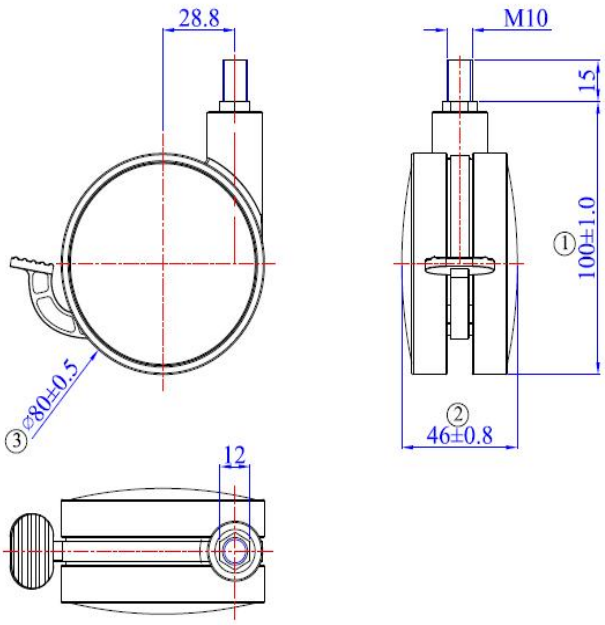

HELEN 80

Swivel caster, Ø 80 mm



Robby Code:2041-0026-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Silver Grey+ Black
Without Brake
Wheel with Plain Bearings and PA Wheel, Cover ABS
Connection via Threaded bolt 10x15MM


Mounting height (mm)	100
Offset (mm)	28.8
Swivel radius (mm)	73
Wheel Ø (mm)	80
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Silver Grey
Colour of wheel hub/cover	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	268 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	50 pcs
Carton Size	42x28x21 cm

Drawing

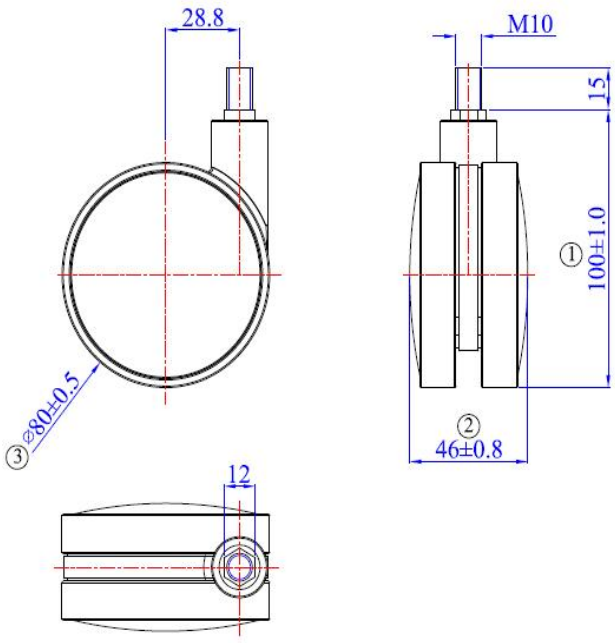

HELEN 80

Swivel caster, Ø 80 mm



Robby Code:2041-0027-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Silver Grey+Black
With Brake
Wheel with Plain Bearings and PA Wheel, Brake PA, Cover ABS
Connection via Plate 47x47x.52mm


Mounting height (mm)	105
Offset (mm)	28.8
Swivel radius (mm)	91
Wheel Ø (mm)	80
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Silver Grey
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	310 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	38x26x24.5 cm

Drawing

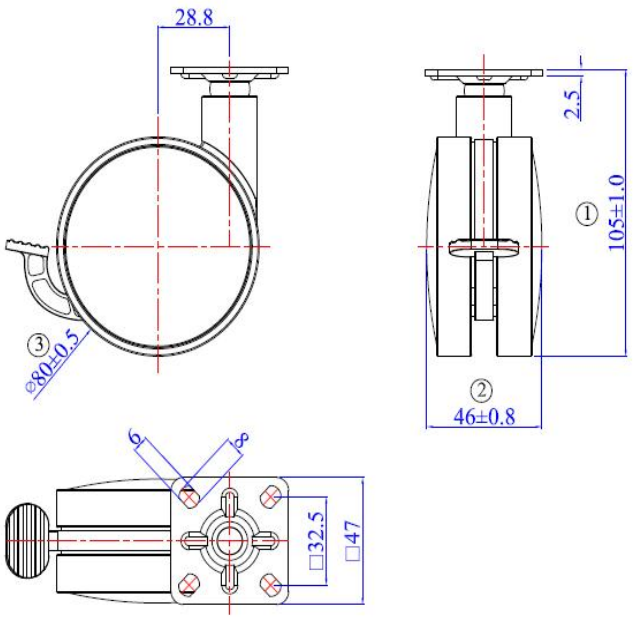

HELEN 80

Swivel caster, Ø 80 mm



Robby Code:2041-0003-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Silver Grey+Black
Without Brake
Wheel with Plain Bearings and PA Wheel, Cover ABS
Connection via Plate 47x47x.52mm

Mounting height (mm)	105
Offset (mm)	28.8
Swivel radius (mm)	73
Wheel Ø (mm)	80
Wheel width (mm)	46
Wheel hardness	95shore A
Fork colour	Silver Grey
Colour of wheel hub/cover	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	298 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details	
QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	38x26x24.5 cm

Drawing

