Olym 60V4

Swivel caster, Ø 60 mm



Swivel caster, Housing made of PA
Colour: Black
With Brake
Wheel with carbon steel Bearings and PA +TPU Wheel, Brake PA
Connection via Threaded bolt M10x15mm


Mounting height (mm)	90
Offset (mm)	32
Swivel radius (mm)	63
Wheel Ø (mm)	60
Wheel width (mm)	27
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	115g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs
Carton Size	40x27x18 cm

Drawing

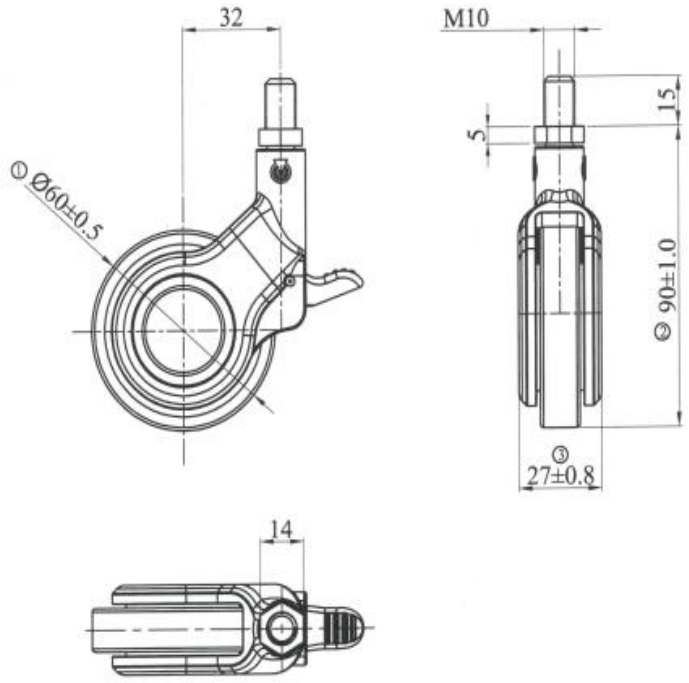

Olym 60V4

Swivel caster, Ø 60 mm




Swivel caster, Housing made of PA
Colour: Black
Without Brake
Wheel with carbon steel Bearings and PA +TPU Wheel
Connection via Threaded bolt M10x15mm

Mounting height (mm)	90
Offset (mm)	32
Swivel radius (mm)	63
Wheel Ø (mm)	60
Wheel width (mm)	27
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	107 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details	
QTY Per Bag	1pc
QTY Per Carton	100 pcs
Carton Size	40x27x18 cm

Drawing

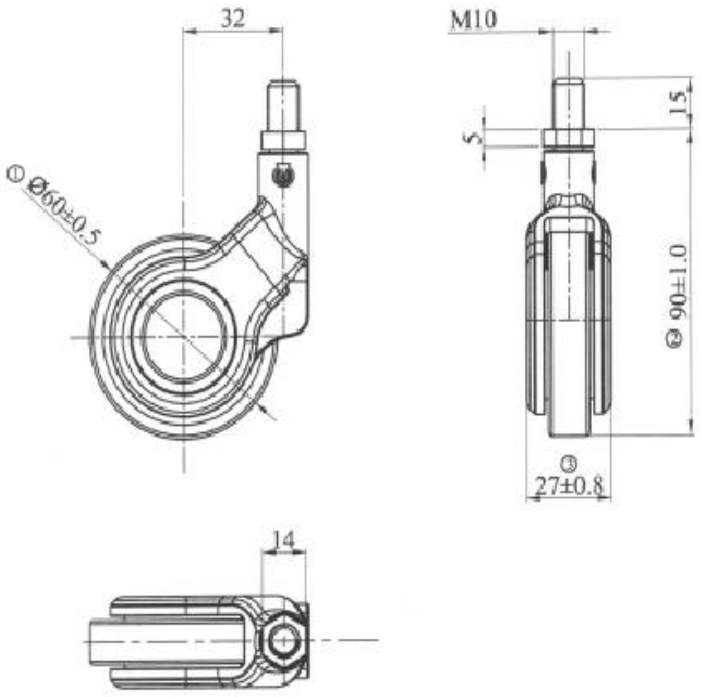

Olym 60V4

Swivel caster, Ø 60 mm



Swivel caster, Housing made of PA
Colour: Black
With Brake
Wheel with carbon steel Bearings and PA +TPU Wheel, Brake PA
Connection via Pin ø11X22


Mounting height (mm)	88
Offset (mm)	32
Swivel radius (mm)	63
Wheel Ø (mm)	60
Wheel width (mm)	27
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Brake colour	Black
Attachment	Pin
Fitting dimension	ø11X22
Weight	113 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs
Carton Size	40x27x18 cm

Drawing

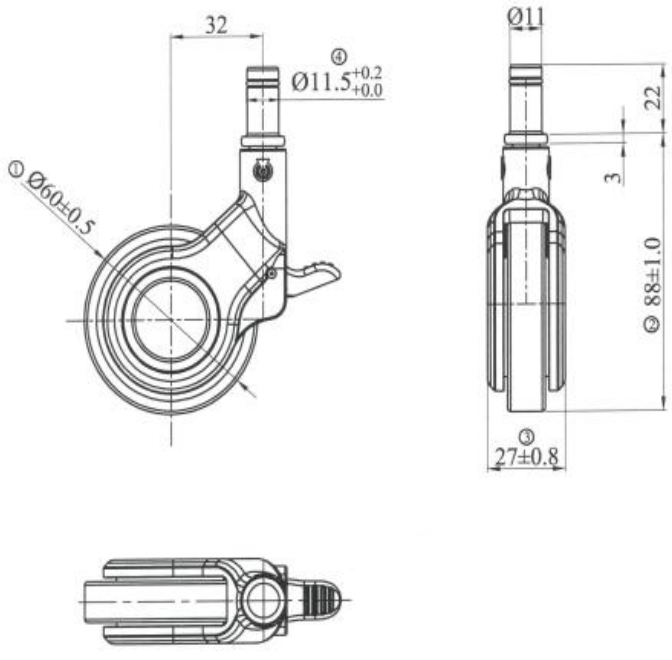

Olym 60V4

Swivel caster, Ø 60 mm



Swivel caster, Housing made of PA
Colour: Black
Without Brake
Wheel with carbon steel Bearings and PA +TPU Wheel
Connection via Pin ø11X22


Mounting height (mm)	88
Offset (mm)	32
Swivel radius (mm)	63
Wheel Ø (mm)	60
Wheel width (mm)	27
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Attachment	Pin
Fitting dimension	ø11X22
Weight	70 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs
Carton Size	40x27x18 cm

Drawing

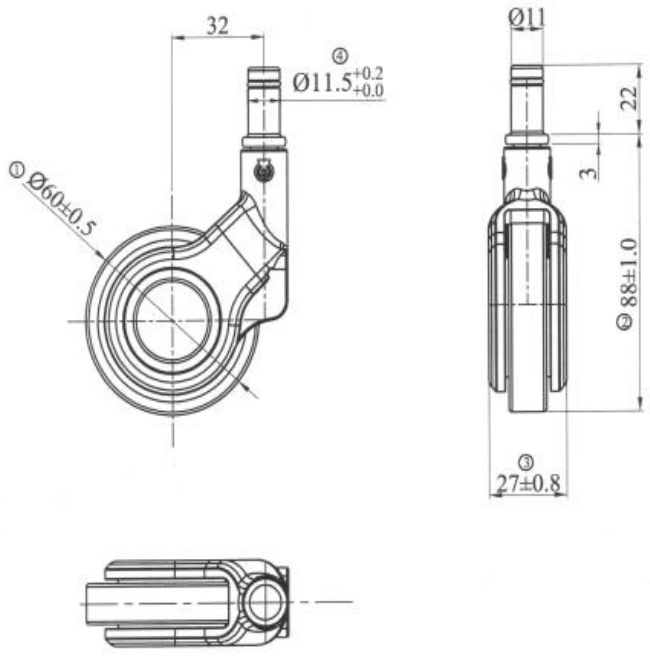

Olym 60V4

Swivel caster, Ø 60 mm



Swivel caster, Housing made of PA
Colour: Black
With Brake
Wheel with carbon steel Bearings and PA +TPU Wheel, Brake PA
Connection via Plate 47x47x2.5mm


Mounting height (mm)	93.5
Offset (mm)	32
Swivel radius (mm)	63
Wheel Ø (mm)	60
Wheel width (mm)	27
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	120 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100pcs
Carton Size	42x28x21 cm

Drawing

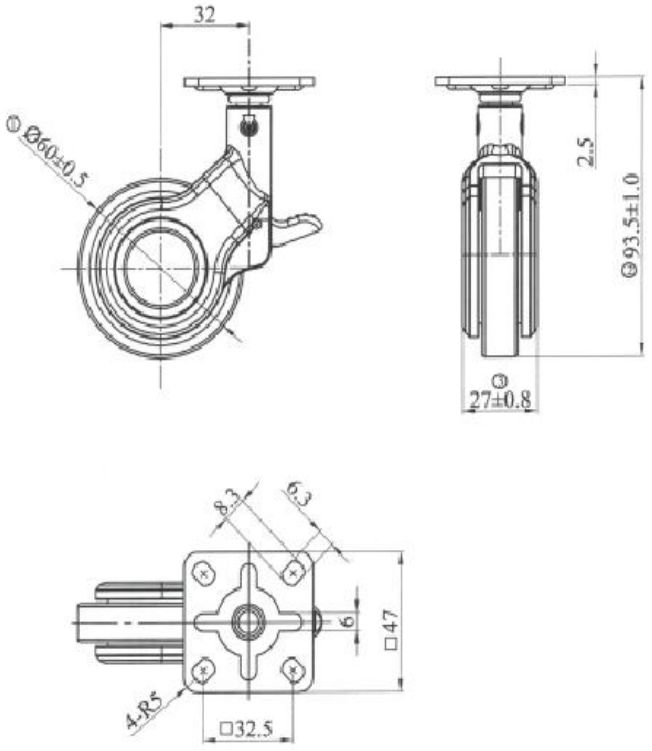

Olym 60V4

Swivel caster, Ø 60 mm



Swivel caster, Housing made of PA
Colour: Black
Without Brake
Wheel with carbon steel Bearings and PA +TPU Wheel
Connection via Plate 47x47x2.5mm

Mounting height (mm)	93.5
Offset (mm)	32
Swivel radius (mm)	63
Wheel Ø (mm)	60
Wheel width (mm)	27
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	All Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	112 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100pcs
Carton Size	42x28x21 cm

Drawing

