SKY 50

Swivel caster, Ø 50 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour: Black
With Brake
Wheel with Plain Bearings and PA Wheel, Brake PA+20% GF
Connection via Pin Ø11x22mm


Mounting height (mm)	57
Offset (mm)	18
Swivel radius (mm)	57
Wheel Ø (mm)	50
Wheel width (mm)	45
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	92 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	31x28x20 cm

Drawing

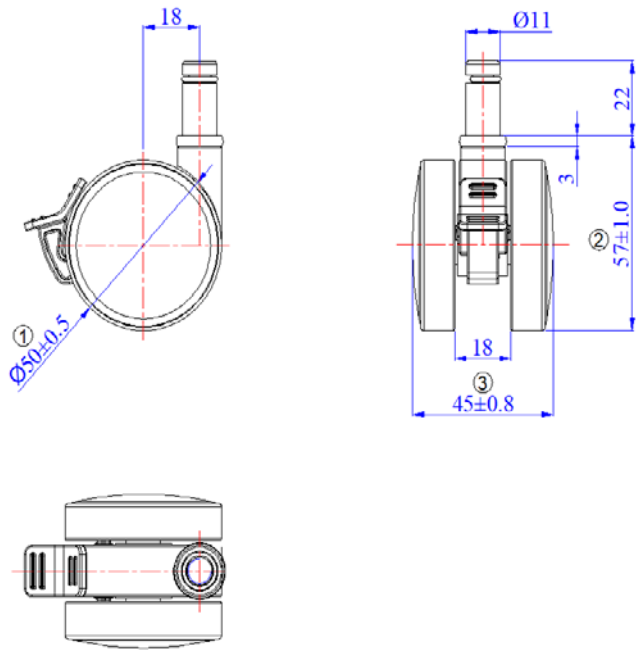

SKY 50

Swivel caster, Ø 50 mm



Robby Code:
SPA Code:


Double swivel caster, Housing made of PA
Colour:Black
Without Brake
Wheel with Plain Bearings and PA Wheel
Connection via Pin Ø11x22mm

Mounting height (mm)	57
Offset (mm)	18
Swivel radius (mm)	48
Wheel Ø (mm)	50
Wheel width (mm)	45
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	83 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details	
QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	31x28x20 cm

Drawing

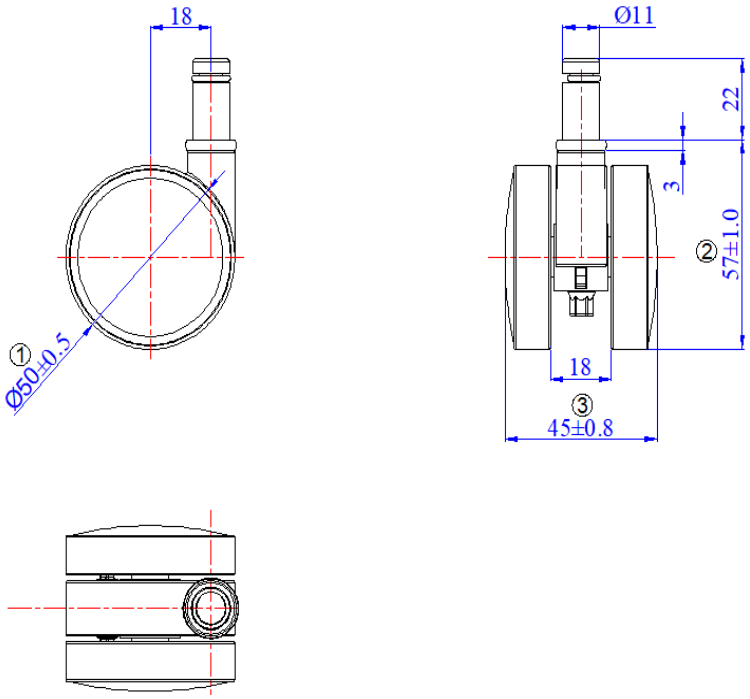

SKY 50

Swivel caster, Ø 50 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour: Black
With Brake
Wheel with Plain Bearings and PA Wheel, Brake PA+20% GF
Connection via Threaded bolt M10x15MM


Mounting height (mm)	58
Offset (mm)	18
Swivel radius (mm)	57
Wheel Ø (mm)	50
Wheel width (mm)	45
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	88 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs
Carton Size	31x28x20 cm

Drawing

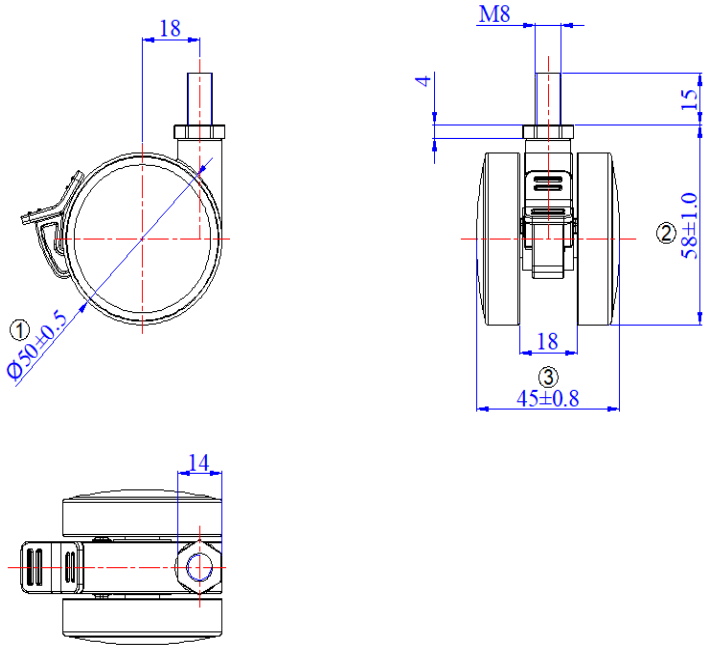

SKY 50

Swivel caster, Ø 50 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour: Black
Without Brake
Wheel with Plain Bearings and PA Wheel
Connection via Threaded bolt M10x15MM


Mounting height (mm)	58
Offset (mm)	18
Swivel radius (mm)	48
Wheel Ø (mm)	50
Wheel width (mm)	45
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	79.3 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs
Carton Size	31x28x20 cm

Drawing

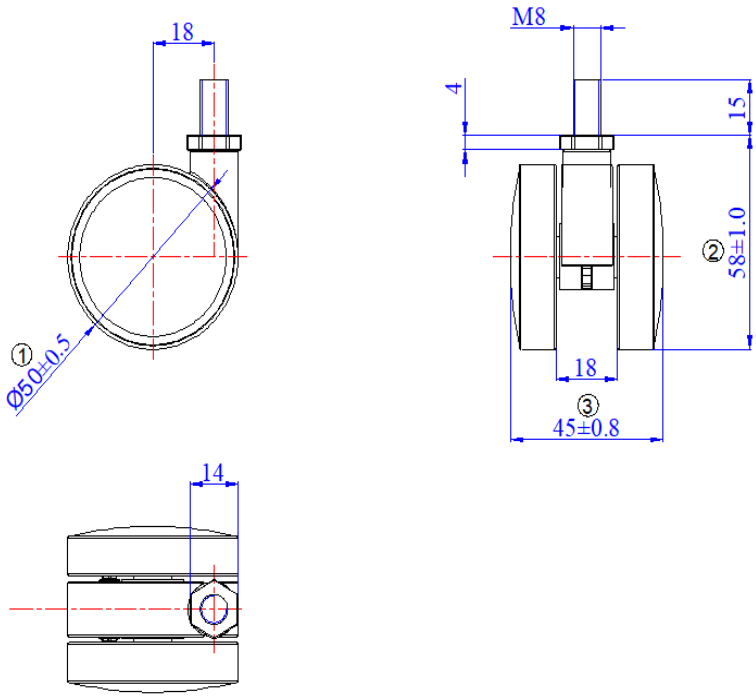

SKY 50

Swivel caster, Ø 50 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Black
With Brake
Wheel with Plain Bearings and PA Wheel, Brake PA+20% GF
Connection via Plate 47x47x2.5mm


Mounting height (mm)	64
Offset (mm)	18
Swivel radius (mm)	57
Wheel Ø (mm)	50
Wheel width (mm)	45
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	108 g

Load Capacity (dynamic)	50kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	31x28x20 cm

Drawing

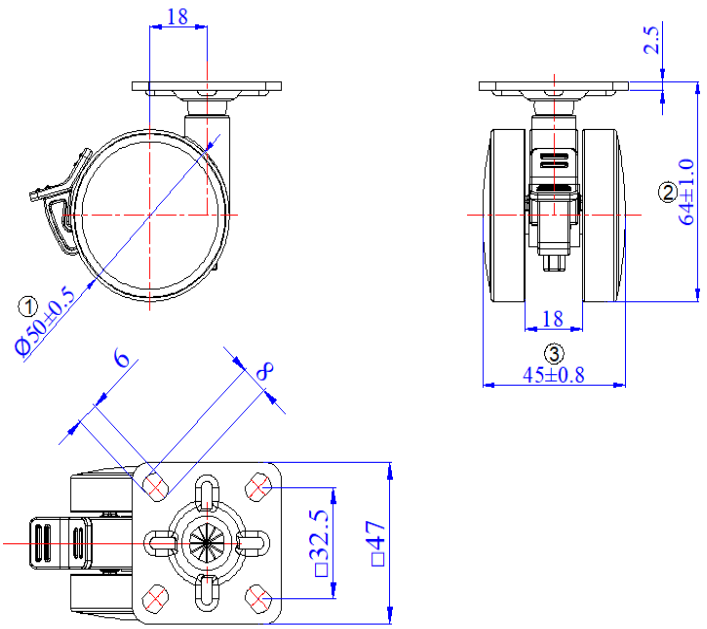

SKY 50

Swivel caster, Ø 50 mm



Robby Code:
SPA Code:


Double swivel caster, Housing made of PA
Colour: Black
Without Brake
Wheel with Plain Bearings and PA Wheel
Connection via Plate 47x47x2.5mm

Mounting height (mm)	64
Offset (mm)	18
Swivel radius (mm)	48
Wheel Ø (mm)	50
Wheel width (mm)	45
Wheel hardness	95shore A
Fork colour	Black
Colour of wheel hub/cover	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	98 g

Load Capacity (dynamic)	50kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details	
QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	31x28x20 cm

Drawing

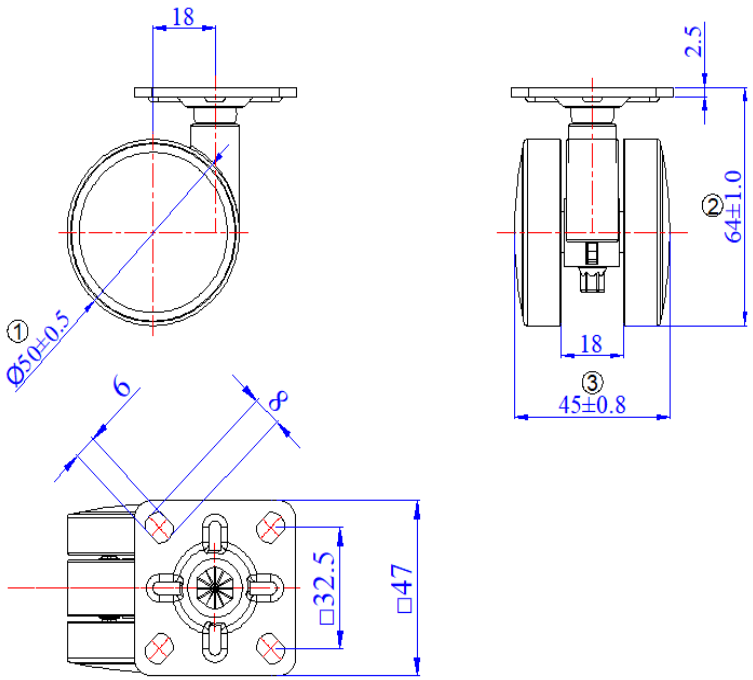

SKY 57

Swivel caster, Ø 57 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + White
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Pin Ø11x22mm


Mounting height (mm)	64
Offset (mm)	19
Swivel radius (mm)	67
Wheel Ø (mm)	57
Wheel width (mm)	48
Wheel hardness	95shore A
Fork colour	White RAL7047
Colour of wheel hub/cover	Light grey RAL 7040+White RAL7047
Brake colour	Light grey RAL 7040
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	124 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pcs
QTY Per Carton	100 pcs
Carton Size	42x28x27 cm

Drawing

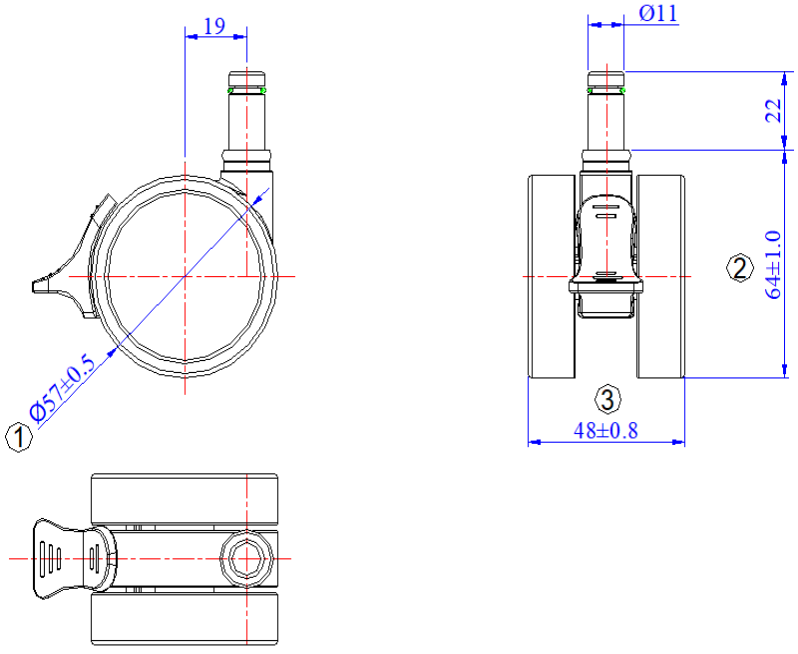

SKY 57

Swivel caster, Ø 57 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + White
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel
Connection via Pin Ø11x22mm


Mounting height (mm)	64
Offset (mm)	19
Swivel radius (mm)	54
Wheel Ø (mm)	57
Wheel width (mm)	48
Wheel hardness	95shore A
Fork colour	White RAL7047
Colour of wheel hub/cover	Light grey RAL 7040+White RAL7047
Attachment	Light grey RAL 7040
Fitting dimension	Pin Ø11x22mm
Weight	116 g


Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pcs
QTY Per Carton	100 pcs
Carton Size	42x28x21 cm

Drawing

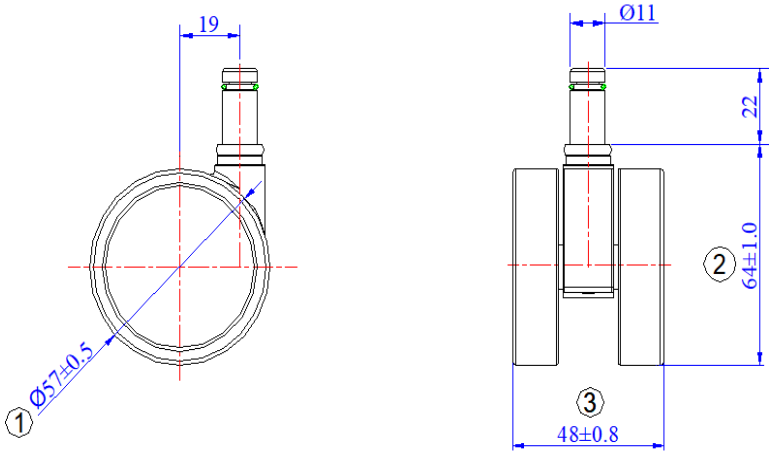



SKY 57

Swivel caster, Ø 57 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + White
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Threaded bolt M10x15MM


Mounting height (mm)	66
Offset (mm)	19
Swivel radius (mm)	67
Wheel Ø (mm)	57
Wheel width (mm)	48
Wheel hardness	95shore A
Fork colour	White RAL7047
Colour of wheel hub/cover	Light grey RAL 7040+White RAL7047
Brake colour	Light grey RAL 7040
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	143 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pcs
QTY Per Carton	100 pcs
Carton Size	42x28x27 cm

Drawing

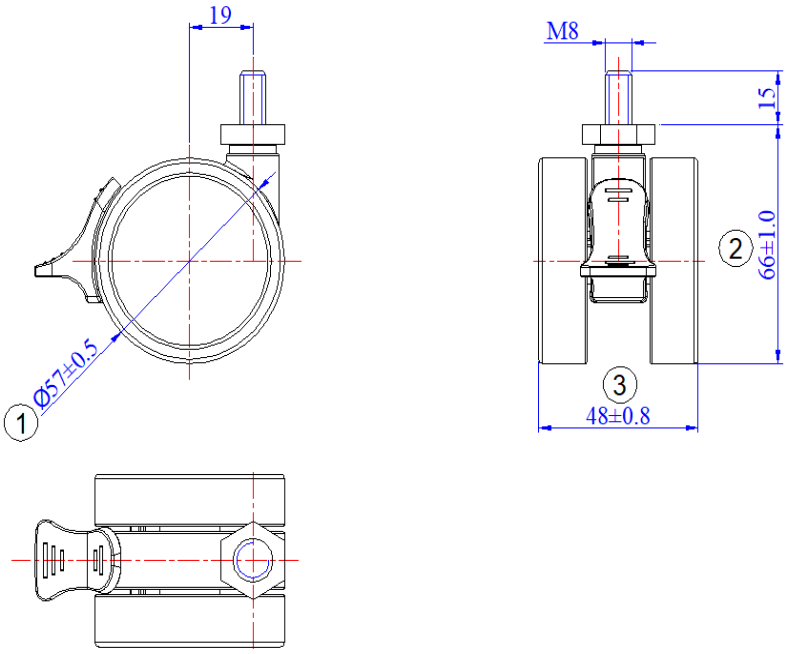

SKY 57

Swivel caster, Ø 57 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + White
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Threaded bolt M10x15MM


Mounting height (mm)	66
Offset (mm)	19
Swivel radius (mm)	54
Wheel Ø (mm)	57
Wheel width (mm)	48
Wheel hardness	95shore A
Fork colour	White RAL7047
Colour of wheel hub/cover	Light grey RAL 7040+White RAL7047
Attachment	Light grey RAL 7040
Fitting dimension	M10x15mm
Weight	134 g

Load Capacity (dynamic)	50 kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pcs
QTY Per Carton	100 pcs
Carton Size	42x28x21 cm

Drawing

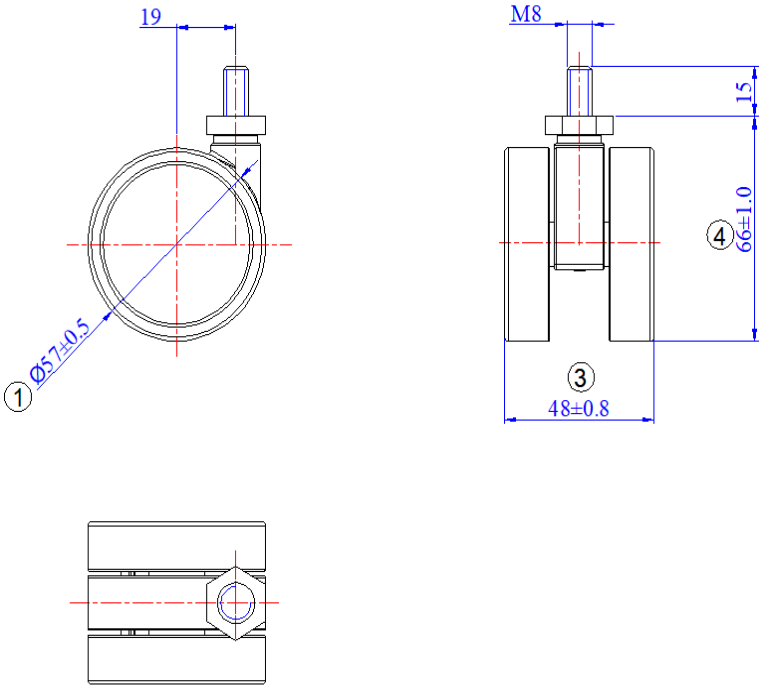

SKY 57

Swivel caster, Ø 57 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + White
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Plate 47x47x2.5mm


Mounting height (mm)	72
Offset (mm)	19
Swivel radius (mm)	67
Wheel Ø (mm)	57
Wheel width (mm)	48
Wheel hardness	95shore A
Fork colour	White RAL7047
Colour of wheel hub/cover	Light grey RAL 7040+White RAL7047
Brake colour	Light grey RAL 7040
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	145 g

Load Capacity (dynamic)	50kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	100 pcs
Carton Size	42x31x21 cm

Drawing

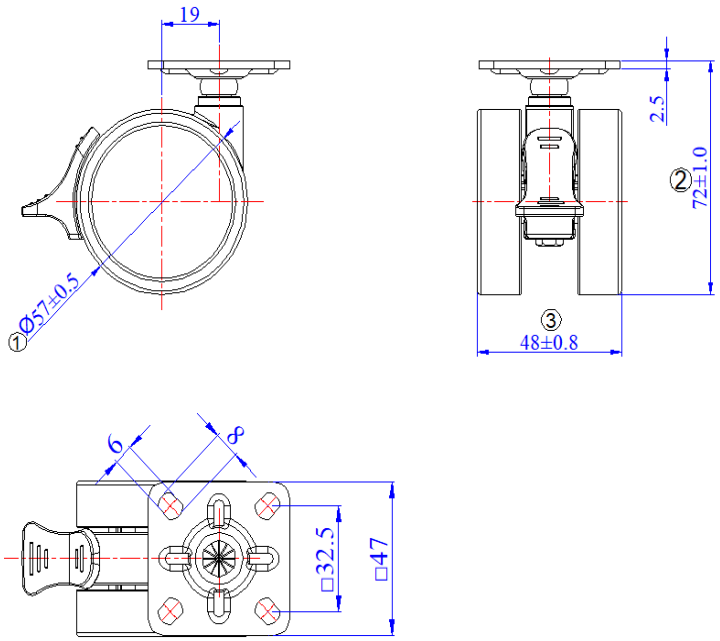

SKY 57

Swivel caster, Ø 57 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + White
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel
Connection via Plate 47x47x2.5mm


Mounting height (mm)	72
Offset (mm)	19
Swivel radius (mm)	54
Wheel Ø (mm)	57
Wheel width (mm)	48
Wheel hardness	95shore A
Fork colour	White RAL7047
Colour of wheel hub/cover	Light grey RAL 7040+White RAL7047
Attachment	Light grey RAL 7040
Fitting dimension	47x47x2.5mm
Weight	137 g

Load Capacity (dynamic)	50kg
Load Capacity (static)	100 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pcs
QTY Per Carton	100 pcs
Carton Size	42x28x21 cm

Drawing

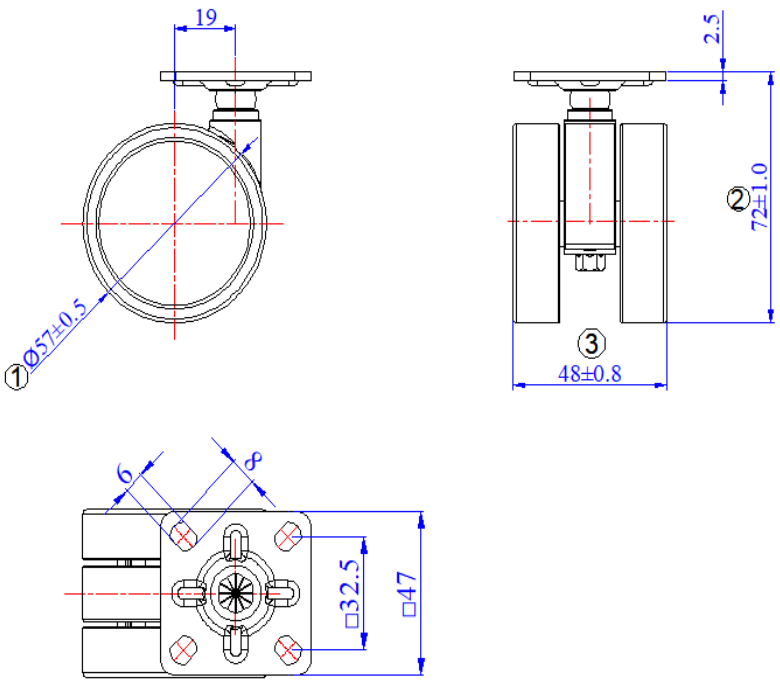

SKY 60

Swivel caster, Ø 60 mm



Robby Code:2043-0008-00
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + Dark grey
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Threaded bolt M10x15MM


Mounting height (mm)	69
Offset (mm)	20
Swivel radius (mm)	68
Wheel Ø (mm)	60
Wheel width (mm)	44
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	.ight grey RAL7040 +Dark grey RAL7012
Brake colour	Dark grey RAL7012
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	154 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	50 pcs
Carton Size	36x25x15 cm

Drawing

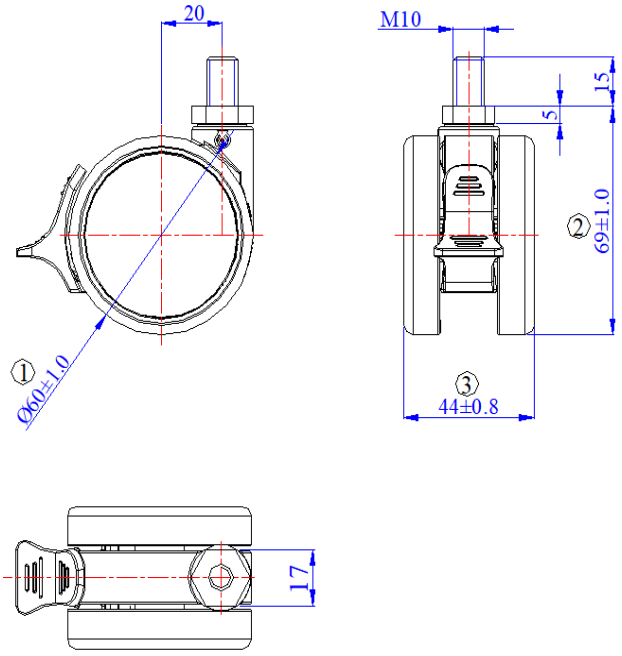

SKY 60

Swivel caster, Ø 60 mm



Robby Code:2043-0007-00
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + Dark grey
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel
Connection via Threaded bolt M10x15MM


Mounting height (mm)	69
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	60
Wheel width (mm)	44
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	.ight grey RAL7040 +Dark grey RAL7012
Attachment	Dark grey RAL7012
Fitting dimension	M10x15mm
Weight	142 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	50 pcs
Carton Size	36x25x15 cm

Drawing

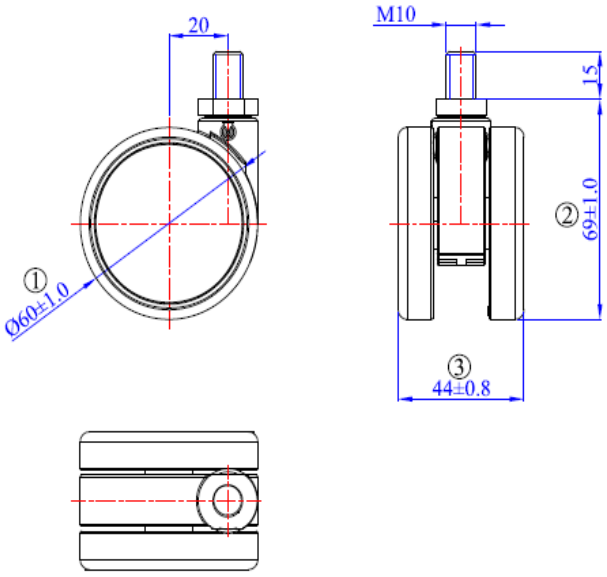

SKY 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + Dark grey
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Plate 47x47x2.5mm


Mounting height (mm)	75
Offset (mm)	20
Swivel radius (mm)	67
Wheel Ø (mm)	60
Wheel width (mm)	44
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	Light grey RAL7040 +Dark grey RAL7012
Brake colour	Dark grey RAL7012
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	174 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	36x25x15 cm

Drawing

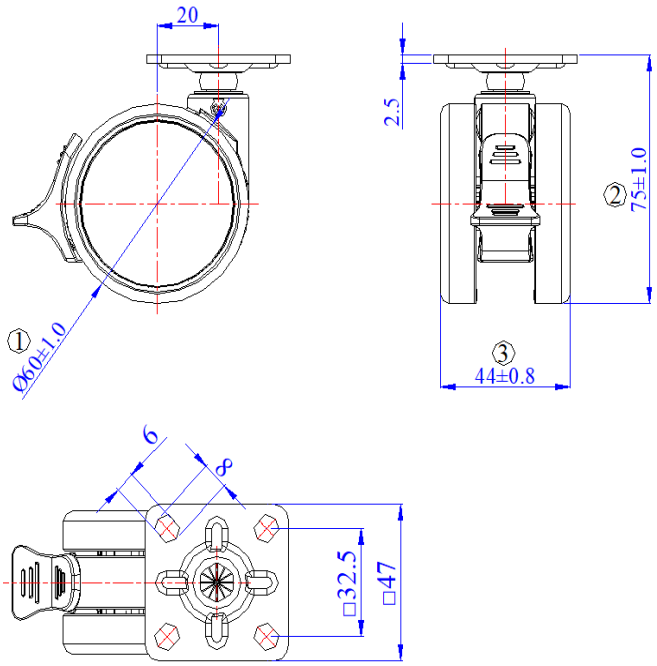

SKY 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + Dark grey
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel
Connection via Plate 47x47x2.5mm


Mounting height (mm)	75
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	60
Wheel width (mm)	44
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	Light grey RAL7040 +Dark grey RAL7012
Attachment	Dark grey RAL7012
Fitting dimension	47x47x2.5mm
Weight	162 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	36x25x15 cm

Drawing

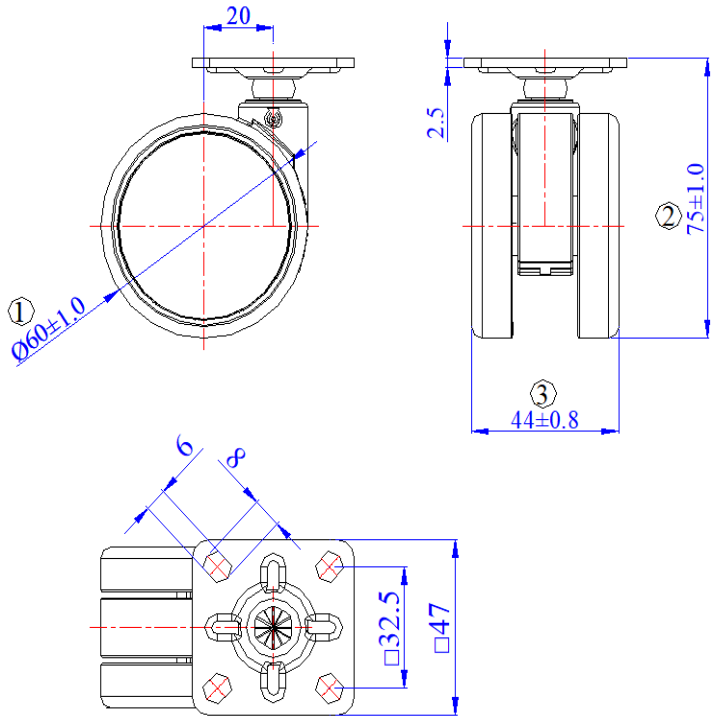

SKY 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + Dark grey
With Brake
Wheel with Plain Bearings and PA+TPU Wheel, Brake PA+20% GF
Connection via Pin Ø11x22mm


Mounting height (mm)	67
Offset (mm)	20
Swivel radius (mm)	68
Wheel Ø (mm)	60
Wheel width (mm)	44
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	Light grey RAL7040 +Dark grey RAL7012
Brake colour	Dark grey RAL7012
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	156 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	36x25x15 cm

Drawing

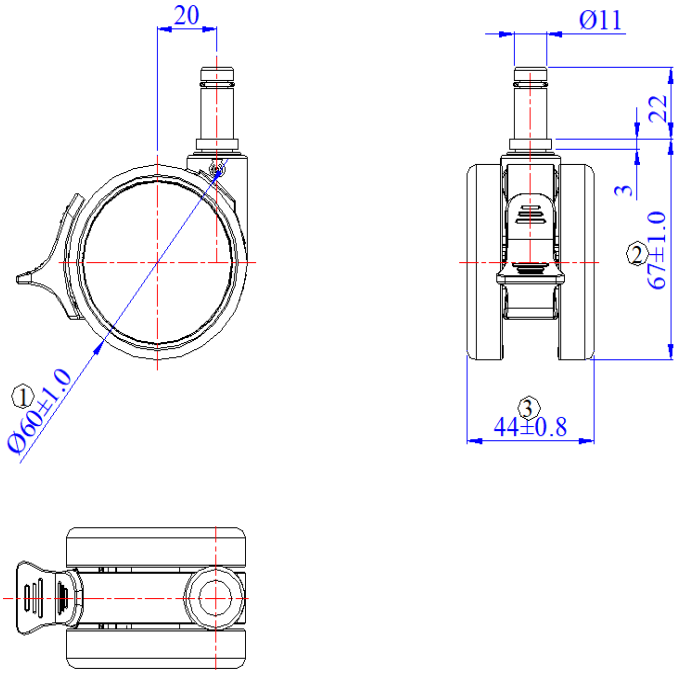

SKY 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA
Colour:Light grey + Dark grey
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel
Connection via Pin Ø11x22mm


Mounting height (mm)	67
Offset (mm)	20
Swivel radius (mm)	54
Wheel Ø (mm)	60
Wheel width (mm)	44
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	Light grey RAL7040 +Dark grey RAL7012
Attachment	Dark grey RAL7012
Fitting dimension	Pin Ø11x22mm
Weight	144 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	50 pcs
Carton Size	36x25x15 cm

Drawing

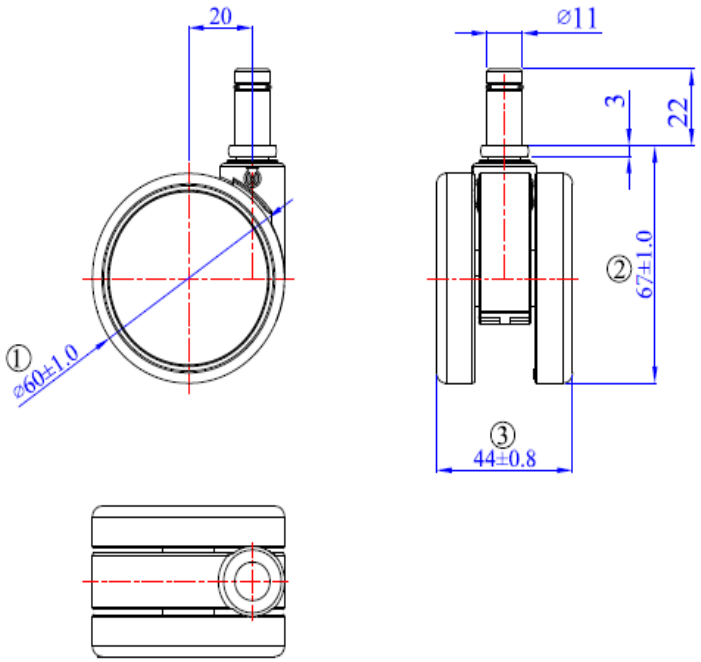

SKY 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of PA (quick installation)
Colour:Light grey + Dark grey
With Brake
Wheel with Plain Bearings and PA+TPU Wheel， Brake PA+20%GF
Connection via Threaded bolt M10x15MM


Mounting height (mm)	90
Offset (mm)	21
Swivel radius (mm)	81
Wheel Ø (mm)	75
Wheel width (mm)	40
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	.ight grey RAL7040 +Dark grey RAL7012
Brake colour	Dark grey RAL7012
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	176 g

Load Capacity (dynamic)	75 kg
Load Capacity (static)	150 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs/80 pcs
Carton Size	40x37x25 cm

Drawing

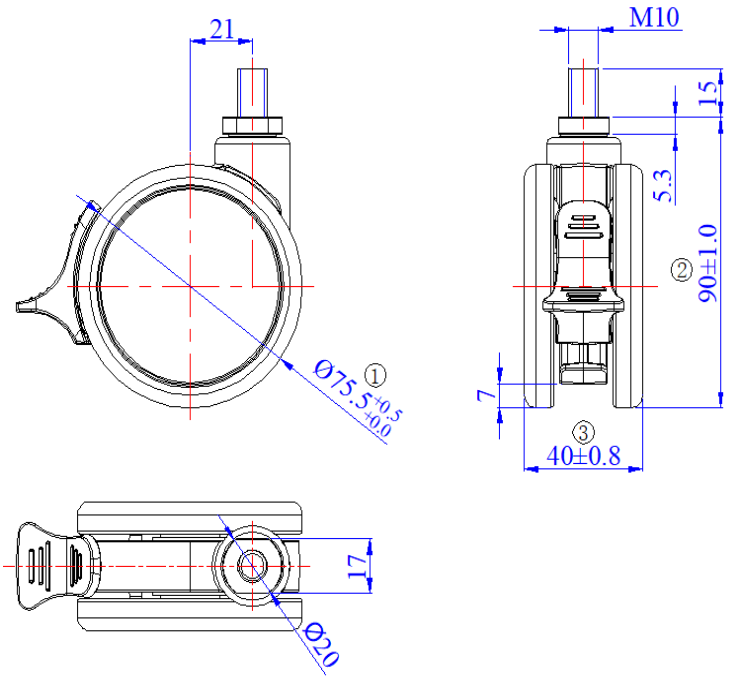

SKY 75

Swivel caster, Ø 75 mm



Robby Code:2034-0003-00
SPA Code:

Double swivel caster, Housing made of PA (quick installation)
Colour:Light grey + Dark grey
Without Brake
Wheel with Plain Bearings and PA+TPU Wheel
Connection via Threaded bolt M10x15MM

Mounting height (mm)	90
Offset (mm)	21
Swivel radius (mm)	62
Wheel Ø (mm)	75
Wheel width (mm)	40
Wheel hardness	95shore A
Fork colour	Light grey RAL7040
Colour of wheel hub/cover	.ight grey RAL7040 +Dark grey RAL7012
Attachment	Dark grey RAL7012
Fitting dimension	M10x15mm
Weight	168 g

Load Capacity (dynamic)	75 kg
Load Capacity (static)	150 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528

Packing Details

QTY Per Bag	1pc
QTY Per Carton	100 pcs/80 pcs
Carton Size	41.5x25.5x20 cm

Drawing

