EVA 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome+Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	74.5
Offset (mm)	23.5
Swivel radius (mm)	75
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	181 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

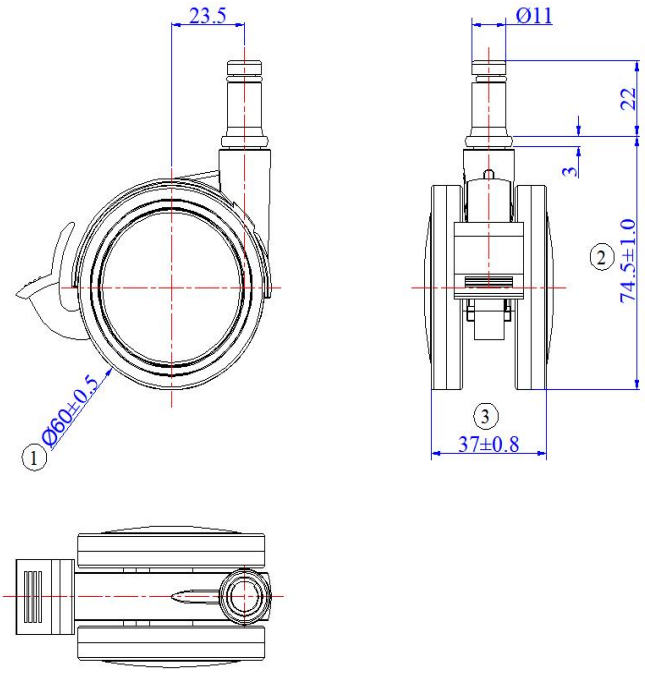

EVA 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome+Black
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	74.5
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	172 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

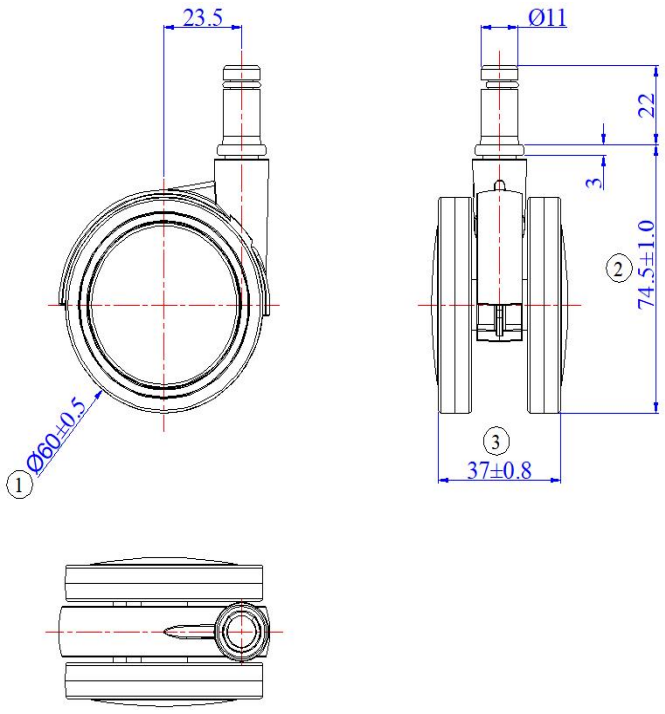

EVA 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome + Grey
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Threaded bolt M8x15MM


Mounting height (mm)	76.5
Offset (mm)	23.5
Swivel radius (mm)	75
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	162 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

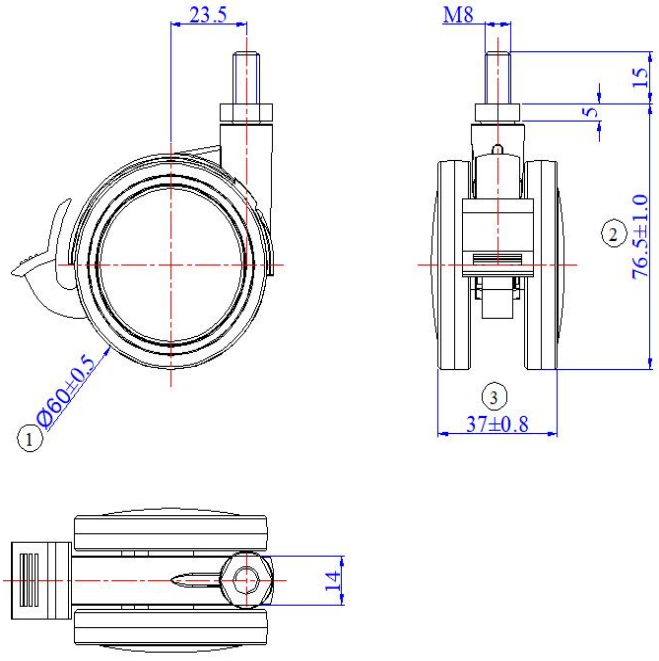

EVA 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome + Black
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Threaded bolt M8x15MM


Mounting height (mm)	76.5
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Attachment	Threaded bolt
Fitting dimension	M8x15mm
Weight	160.6 g

Load Capacity (dynamic)	60 kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

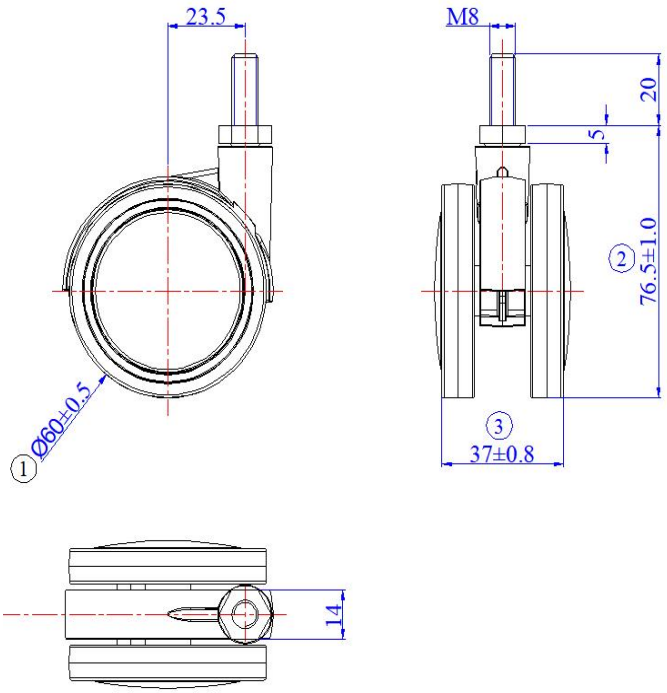

EVA 60

Swivel caster, Ø 60 mm



Robby Code:2005-0217-00
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome + Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	82.5
Offset (mm)	23.5
Swivel radius (mm)	75
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	198.4 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

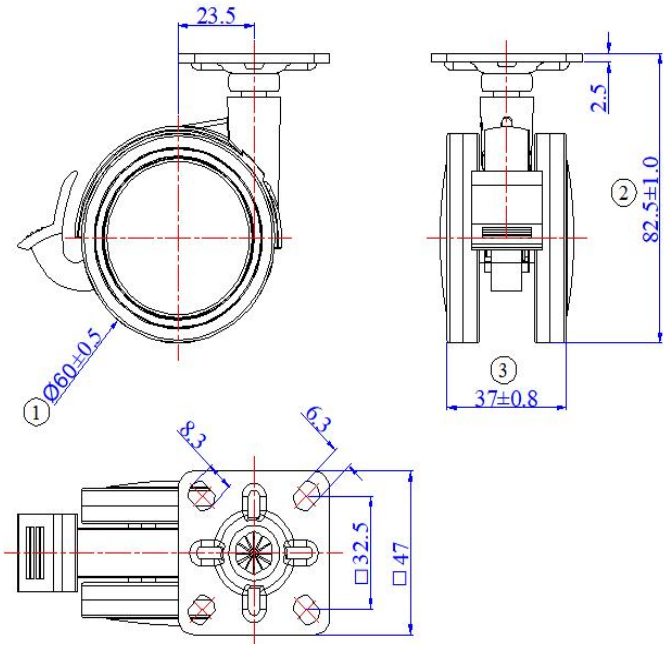

EVA 60

Swivel caster, Ø 60 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome + Black
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	82.5
Offset (mm)	23.5
Swivel radius (mm)	57
Wheel Ø (mm)	60
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	192.7 g

Load Capacity (dynamic)	60kg
Load Capacity (static)	120 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	80 pcs
Carton Size	42x28x21 cm

Drawing

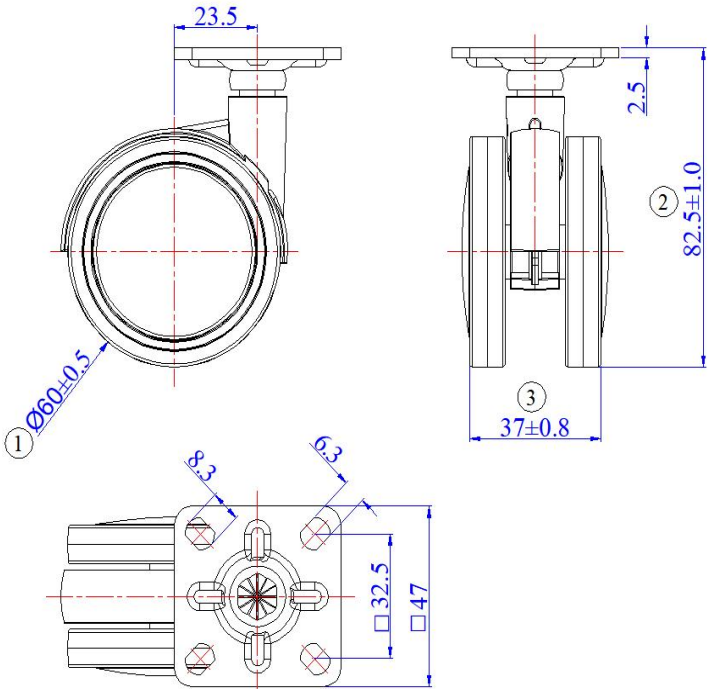

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome+Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	93
Offset (mm)	29
Swivel radius (mm)	86
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Brake colour	Black
Attachment	Pin
Fitting dimension	Pin Ø11x22mm
Weight	263 g

Load Capacity (dynamic)	80kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

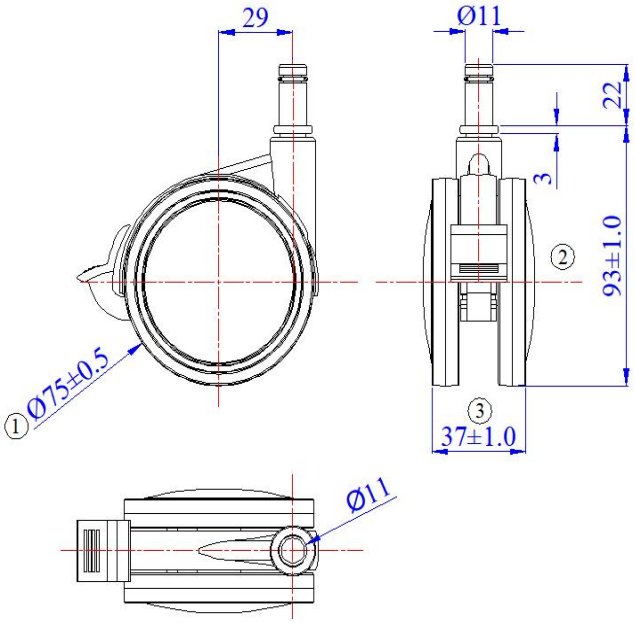

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome+Black
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Pin Ø11x22mm


Mounting height (mm)	93	
Offset (mm)	29	
Swivel radius (mm)	70	
Wheel Ø (mm)	75	
Wheel width (mm)	=	
Wheel hardness	85shore A	
Fork colour	Chrome	
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome	
Attachment	Pin	
Fitting dimension	Pin Ø11x22mm	
Weight	258 g	

Load Capacity (dynamic)	80kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

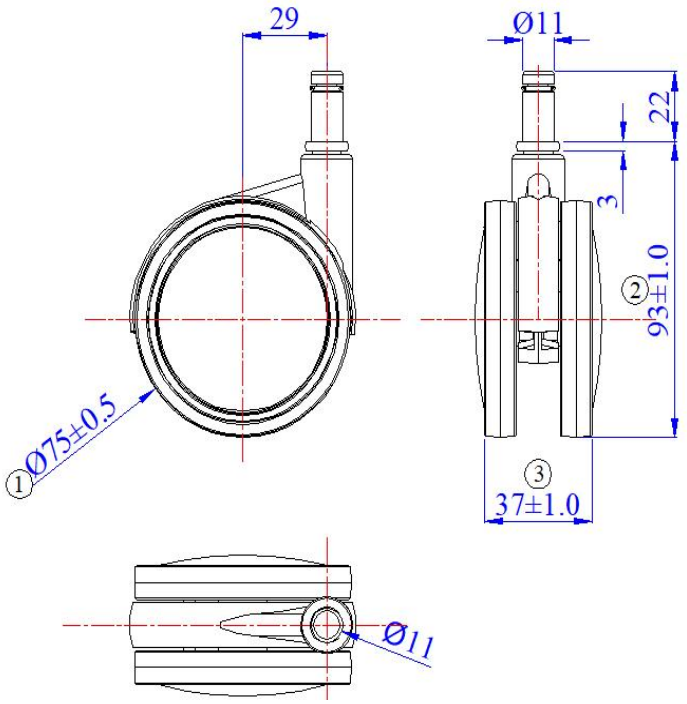

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome + Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Threaded bolt M10x15MM


Mounting height (mm)	95
Offset (mm)	29
Swivel radius (mm)	86
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel :Black, Cover : Chrome
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	243 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

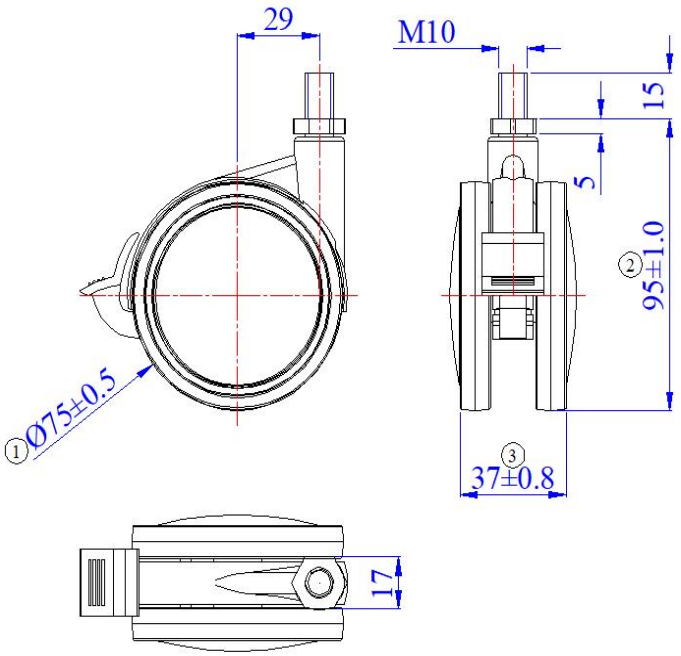

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome + Black
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Threaded bolt M10x15MM


Mounting height (mm)	95
Offset (mm)	29
Swivel radius (mm)	70
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Attachment	Threaded bolt
Fitting dimension	M10x15mm
Weight	231 g

Load Capacity (dynamic)	80 kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

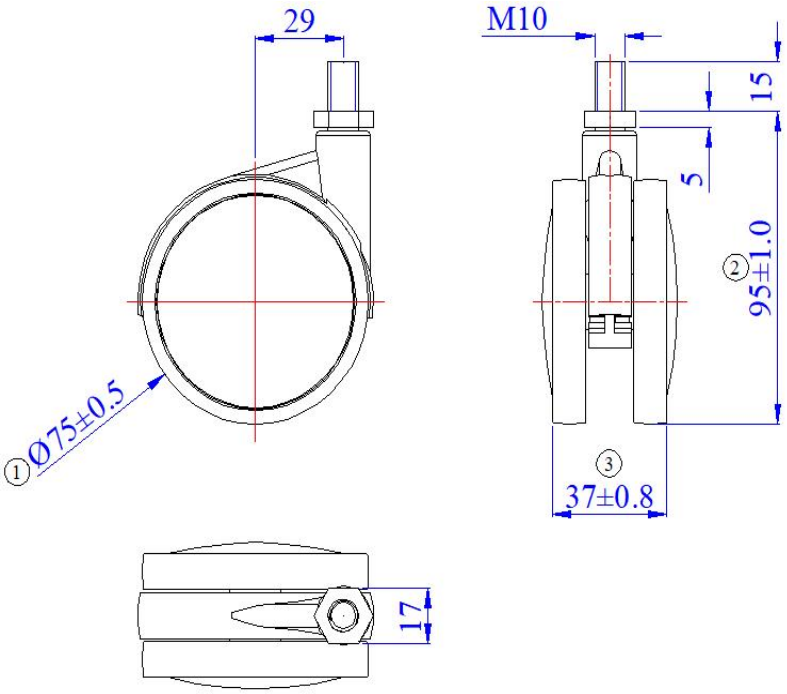

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome + Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	101
Offset (mm)	29
Swivel radius (mm)	86
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Brake colour	Black
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	280 g

Load Capacity (dynamic)	80kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

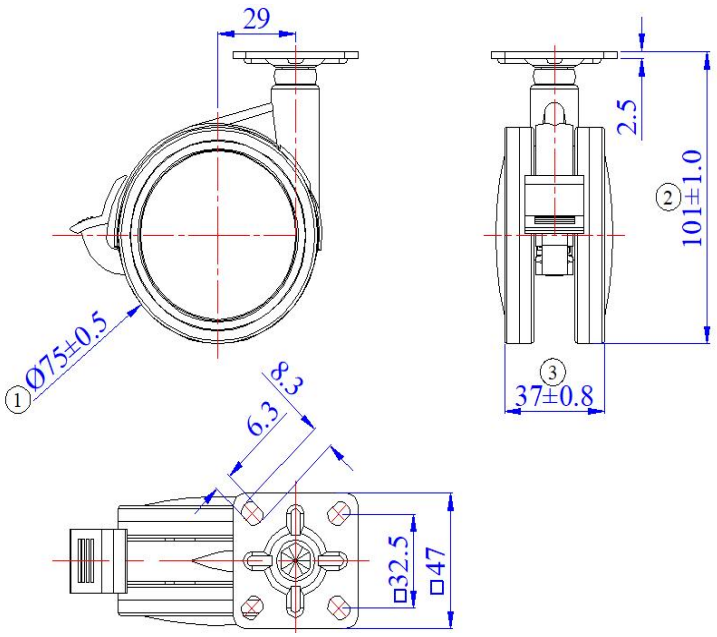

EVA 75

Swivel caster, Ø 75 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome + Black
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Plate 47x47x2.5mm


Mounting height (mm)	101
Offset (mm)	29
Swivel radius (mm)	70
Wheel Ø (mm)	75
Wheel width (mm)	37
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel : Black, Cover : Chrome
Attachment	Plate
Fitting dimension	47x47x2.5mm
Weight	268 g

Load Capacity (dynamic)	80kg
Load Capacity (static)	160 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	40 pcs
Carton Size	31x28x20 cm

Drawing

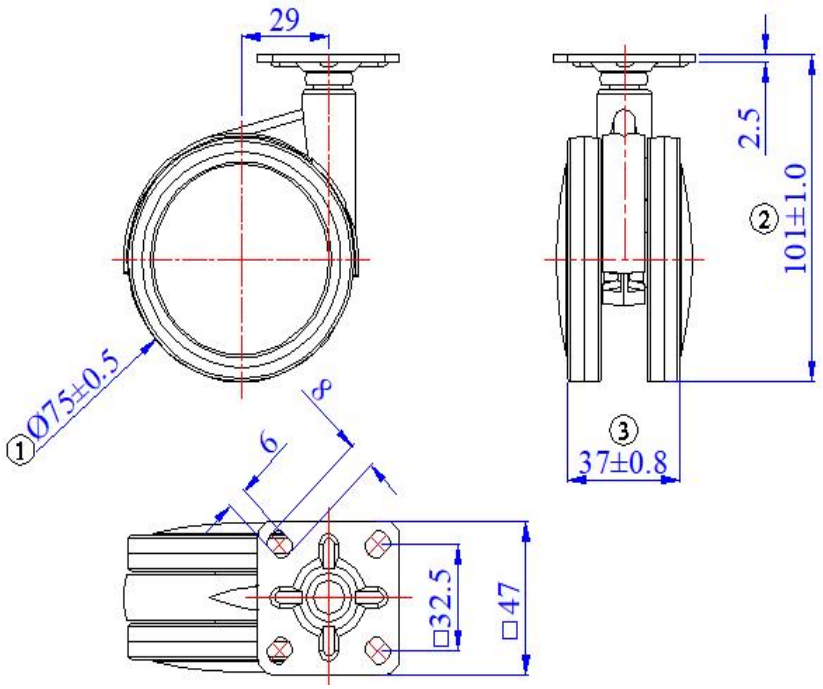

EVA 100

Swivel caster, Ø 100 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome + Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Threaded bolt M10x25MM


Mounting height (mm)	116
Offset (mm)	40
Swivel radius (mm)	116
Wheel Ø (mm)	100
Wheel width (mm)	46
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel: Black , Cover: Chrome
Brake colour	Black
Attachment	Threaded bolt
Fitting dimension	M10x25mm
Weight	505 g

Load Capacity (dynamic)	75 kg
Load Capacity (static)	150 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	30 pcs
Carton Size	42x31x21 cm

Drawing

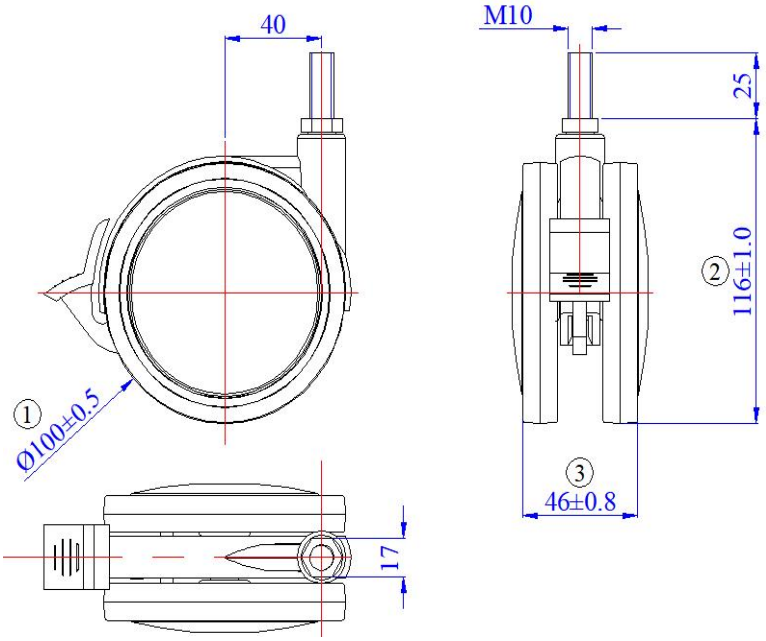

EVA 100

Swivel caster, Ø 100 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour:Chrome + Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Threaded bolt M10x25MM


Mounting height (mm)	116
Offset (mm)	40
Swivel radius (mm)	93
Wheel Ø (mm)	100
Wheel width (mm)	46
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel: Grey , Cover: Chrome
Attachment	Threaded bolt
Fitting dimension	M10x25mm
Weight	492 g

Load Capacity (dynamic)	75 kg
Load Capacity (static)	150 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1pc
QTY Per Carton	30 pcs
Carton Size	42x31x21 cm

Drawing

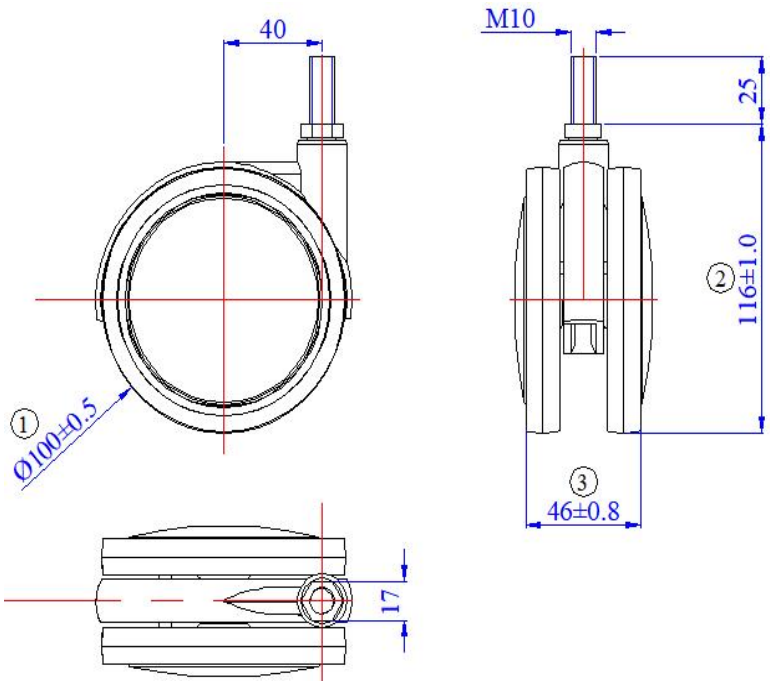

EVA 100

Swivel caster, Ø 100 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome + Black
With Brake
Wheel with Plain Bearings and PP+TPE Wheel,PA Brake, ABS Cover
Connection via Plate 80x60x3mm


Mounting height (mm)	123
Offset (mm)	40
Swivel radius (mm)	116
Wheel Ø (mm)	100
Wheel width (mm)	46
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel: Black , Cover: Chrome
Brake colour	Black
Attachment	Plate
Fitting dimension	80x60x3mm
Weight	525 g

Load Capacity (dynamic)	75kg
Load Capacity (static)	150 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	30 pcs
Carton Size	42x31x21 cm

Drawing

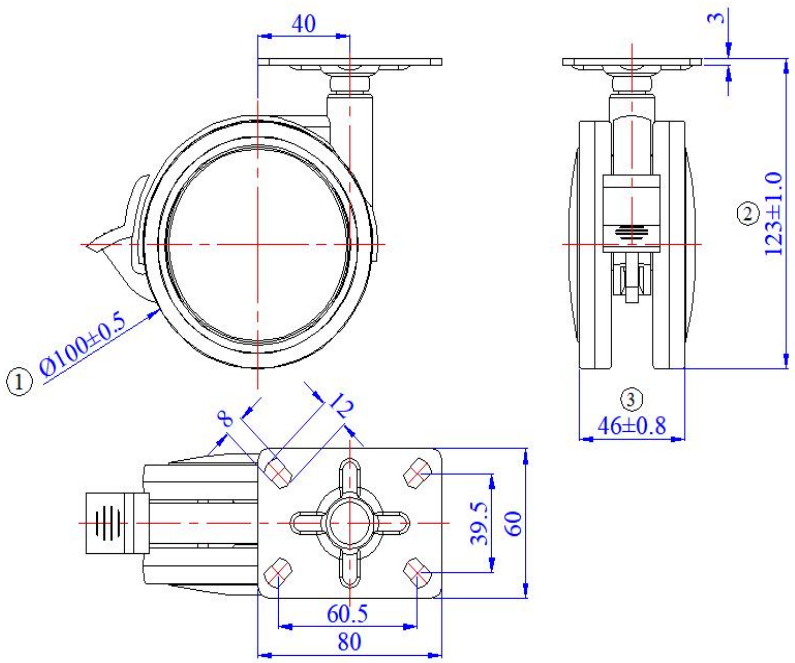

EVA 100

Swivel caster, Ø 100 mm



Robby Code:
SPA Code:

Double swivel caster, Housing made of Zinc Alloy
Colour: Chrome + Grey
Without Brake
Wheel with Plain Bearings and PP+TPE Wheel，ABS Cover
Connection via Plate 80x60x3mm

Mounting height (mm)	123
Offset (mm)	40
Swivel radius (mm)	93
Wheel Ø (mm)	100
Wheel width (mm)	47
Wheel hardness	85shore A
Fork colour	Chrome
Colour of wheel hub/cover	Wheel: Grey , Cover: Chrome
Attachment	Plate
Fitting dimension	80x60x3mm
Weight	512 g

Load Capacity (dynamic)	75kg
Load Capacity (static)	150 kg
Temperature Range	0 °C- 60 °C
Compliance	RoHS
Standards	DIN EN 12528
	ANSI BIFMA 5.1

Packing Details

QTY Per Bag	1 pc
QTY Per Carton	30 pcs
Carton Size	42x31x21 cm

Drawing

